CE60258 AI/ML for Sustainable Infrastructure Systems
One-Month Integrated Big Problem

Post-Tensioned Prestressed Concrete I-Girder Bridge of 33 m Span

Design, prestressing, healthy baseline, inspection and monitoring, AI/ML-assisted condition assessment and maintenance

Submitted by
Shashank Pandya
Roll No. 23CE10064

Course Instructor
Prof. Nirjhar Dhang

Department of Civil Engineering
Indian Institute of Technology Kharagpur

Abstract

This report presents an integrated study of a post-tensioned prestressed concrete I-girder bridge of 33 m span, followed from the choice of the cross-section to a maintenance decision eighteen years after construction. The bridge, called B33, has a 16.0 m deck carrying three traffic lanes and two footpaths on six precast M45 I-girders at 2.70 m spacing. A grillage analysis for IRC:6 loading and a design to IRC:112 led to four 12T15 cables per girder, stressed in two stages; after a total loss of 23.5 % the effective prestress is 7.17 MN per girder and the soffit remains uncracked under the rare load combination. A healthy baseline was established by updating the design model on simulated commissioning tests and by one year of monitoring, which showed a seasonal variation of about 4 % in the natural frequencies that had to be removed by temperature and traffic normalisation. Inspection, NDT and monitoring schemes were designed for the bridge, and six deterioration mechanisms were modelled in a digital twin to generate 3600 synthetic measurement campaigns. Novelty detection, random forests, Gaussian-process regression and clustering applied to physically defined features showed that vibration data alone identify the mechanisms poorly (macro-F1 0.32), while the combined data reach 0.90, and that loss of prestress appears in levelling and vibrating-wire strain long before it affects vibration or load tests. Applied to the bridge at an age of 18 years, the assessment traced restrained bearings, corrosion near an anchorage and a small loss of prestress to a single leaking expansion joint, and a maintenance scheme was prepared on that basis.

Keywords: post-tensioned I-girder bridge, prestress loss, grillage analysis, structural health monitoring, operational modal analysis, synthetic data, random forest, Gaussian process, condition assessment, bridge maintenance.

Acknowledgement

I thank Prof. Nirjhar Dhang for setting a problem that made me follow one bridge through its whole life instead of solving separate exercises, and for the clarifications given during the month. Working on it showed me how closely design choices, inspection practice and the usefulness of monitoring data depend on each other.

Shashank Pandya

Contents

Abstract **2**

Acknowledgement **2**

List of Figures **3**

List of Tables **3**

Notation **3**

1 Introduction **9**

1.1 Objective 9

1.2 Approach 9

1.3 Assumed site and service conditions 10

1.4 Codes and standards 11

1.5 Software 11

2 Bridge Configuration **12**

2.1 Cross-section 12

2.2 Number and spacing of girders 12

2.3 Girder section 13

2.4 Deck slab, cross girders and diaphragms 14

2.5 Bearings and expansion joints 14

2.6 Materials 14

3 Structural Analysis and Preliminary Design **15**

3.1 Loads 15

3.2 Load combinations 15

3.3 Grillage model 16

3.4 Checks on the model 16

3.5 Load effects 17

4 Prestressing System **18**

4.1 Cables and jacking force 18

4.2 Cable layout and profiles 18

4.3 Stressing sequence 19

4.4 Losses of prestress 19

4.5 Stresses at the important stages 21

4.6 Flexure at the ultimate limit state 22

4.7 Shear 23

4.8 Deflection and camber 23

4.9 Bearings 23

4.10 Anchorage zones and other details 23

5 Healthy Baseline 24

5.1 Need for a measured baseline 24

5.2 Commissioning tests 24

5.3 Model updating 25

5.4 One year of healthy monitoring 27

6 Visual Inspection Scheme 28

6.1 Components, locations and defects 28

6.2 Condition states and condition index 29

6.3 Types and frequency of inspection 30

6.4 Digital inspection application 30

7 Non-Destructive Testing Programme 31

7.1 Test locations 32

8 Structural Response Measurement 32

9 Vibration Measurement and Signal Processing 34

9.1 Number, location and direction of accelerometers 34

9.2 Sampling frequency and duration 35

9.3 Sources of excitation 35

9.4 Signal processing 36

9.5 Accuracy of identification 36

10 Deterioration Scenarios 36

10.1 Mechanisms and their ranges 37

10.2 Physical models of the mechanisms 38

10.3 Effect on the measured quantities 39

11 Synthetic Data 40

11.1 Generation of a measurement campaign 40

11.2 Examples of the synthetic data 41

12 Feature Extraction 42

13 AI/ML-Assisted Condition Assessment 45

13.1 Is the bridge different from its healthy self? (novelty detection) 45

13.2 Which mechanism? (supervised classification and data fusion) 47

13.3 How much prestress has been lost? (regression with uncertainty) 49

13.4 Where? (localisation) 50

13.5 Do the models use the physics? 50

13.6 Limitations 51

14 Assessment of B33 at an Age of 18 Years 52

14.1 Monitoring record 52
14.2 Principal inspection and NDT at year 18 54
14.3 AI/ML output and its interpretation 56
14.4 Structural check with the estimated loss 57
14.5 Comparison with the hidden history 57
15 Maintenance Scheme 57
15.1 Decision framework 58
15.2 Maintenance plan for B33 after the year-18 assessment 58
15.3 Sequence and justification 59
15.4 Inspection and monitoring after the works 60
15.5 Longer-term improvements 60
16 Use of AI Tools and Verification of Results 60
17 Conclusions 62
References 64
Appendix A: Program Files 65
Appendix B: Verification Checks 65

List of Figures

Figure 1 Flow of the study and the chapters in which each step is described 10
Figure 2 Cross-section of B33 at mid-span (dimensions in m) 12
Figure 3 Precast girder at mid-span and at the anchorage face, showing the ducts and the anchor 13
Figure 4 Live-load moment at mid-span of each girder (with impact and lane reduction) 17
Figure 5 Bending moment and shear force envelopes of girder G1 18
Figure 6 Cable profiles in elevation and in plan 19
Figure 7 Total prestressing force of one girder along its length at successive stages 21
Figure 8 Stresses at mid-span of the outer girder G1 at the construction and service stages (service 22
Figure 9 Commissioning ambient vibration test 25
Figure 10 First bending, torsion and transverse modes and the second bending mode of the updated twin 26
Figure 11 One year of healthy monitoring 27
Figure 12 The inspection application with the year-18 inspection loaded 31
Figure 13 Instrumentation of span S2 in plan 34
Figure 14 AutoMAC of the first eight modes of the twin at the sensor positions, for the first and the 35
Figure 15 Response of the twin (without noise) to each mechanism, from healthy (0) to the upper end 39
Figure 16 Effect of each mechanism on each feature 44
Figure 17 Distributions of six features for healthy (H) and single-mechanism campaigns (boxes 45
Figure 18 Novelty detection 47
Figure 19 ROC-AUC for each mechanism and data source, and macro-averaged F1 score 48
Figure 20 Most likely mechanism for healthy and single-mechanism test campaigns 49
Figure 21 Estimated against true extra loss of prestress for the test campaigns 50
Figure 22 Permutation importance of the five most important features for each mechanism (all sources 51
Figure 23 Eighteen years of monitoring of span S2 53
Figure 24 Year-18 NDT survey of all girders grouped by a Gaussian mixture model, and half-cell 55
Figure 25 Year-18 campaign 56

List of Tables

Table 2 Codes and standards used 11
Table 3 Comparison of girder arrangements at a depth of 1.80 m (preliminary) 12
Table 4 Materials 14
Table 5 Loads acting on one span 15

Table 6 Bending moments at mid-span (G4 to G6 are symmetric to G3 to G1) 17
Table 7 Prestressing forces and losses at mid-span of one girder 20
Table 8 Summary of stress checks (compression positive) 22
Table 9 Design model, commissioning measurements and the updated model (digital twin) 26
Table 10 Baseline structural and monitoring data of the healthy bridge 27
Table 11 Inspection hierarchy, locations and items to be inspected 28
Table 12 Condition states used in the inspection 29
Table 13 Inspection regime 30
Table 14 NDT programme 31
Table 15 Structural response measurement 33
Table 16 Deterioration mechanisms, their models and ranges 37
Table 17 Steps in the generation of one synthetic campaign 40
Table 18 Synthetic load-test, geometry and frequency data for increasing loss of prestress (without ... 41
Table 19 Synthetic NDT data along girder G1 of span S2 at an age of 18 years 41
Table 20 Synthetic vibration data for two deterioration cases and a change of temperature 42
Table 21 The 33 features used by the AI/ML models 42
Table 22 Share of test campaigns flagged by the novelty detector 46
Table 23 ROC-AUC / F1 for each mechanism and data source (test set) 48
Table 24 Trend identification on the monitoring record 53
Table 25 Main observations of the year-18 inspection (condition state 3 and worse) 54
Table 26 Decision matrix used for B33 58
Table 27 Maintenance actions, time frames and the evidence behind each 59
Table 28 AI tools used in this work 60
Table 29 Main results 62
Table 30 Program and data files 65
Table 31 Independent checks of the computed results 65

Notation

Symbol	Meaning
L	effective span (33.0 m)
P_j, P_0, P_e	jacking force, force after immediate losses, effective force after all losses
η	ratio of actual to expected effective prestress
A, I, Z_b, Z_t	area, second moment of area, section moduli (bottom, top)
e	eccentricity of the prestressing force
f_{ck}, f_{ctm}, E_{cm}	characteristic cube strength, mean tensile strength, mean modulus of concrete
f_{pk}, $f_{p0.1k}$, E_p	tensile strength, 0.1 % proof stress and modulus of strand

Symbol	Meaning
μ, k	friction coefficient, wobble coefficient
$\varphi(t,t_0)$, ε_{cs}	creep coefficient, shrinkage strain
$f_1 \ldots f_4$	first bending, first torsion, first transverse and second bending frequency
a_{RMS}, a_{max}	root-mean-square and peak acceleration of a record
δ, ε	deflection, strain
T	effective bridge temperature
CS, BCI	condition state (1 good to 5 critical), bridge condition index (0 to 100)
FDD, MAC	frequency domain decomposition, modal assurance criterion
HCP, UPV, VW	half-cell potential, ultrasonic pulse velocity, vibrating-wire (strain gauge)
GPR, RF, EWMA	Gaussian-process regression, random forest, exponentially weighted moving average
AUC, F1	area under the ROC curve, harmonic mean of precision and recall

1 Introduction

1.1 Objective

The objective of the problem is to study a post-tensioned PSC I-girder bridge as an infrastructure system over its service life. The bridge has to be analysed and designed, prestressed, given a healthy baseline, inspected, tested and monitored, deteriorated in a controlled way, and finally assessed with the help of AI/ML so that a maintenance decision can be taken. I have treated these parts as stages in the life of one bridge rather than as separate exercises, so every chapter uses the bridge, the numbers and the instruments defined in the chapters before it.

1.2 Approach

The work was organised as the chain shown in Figure 1. A configuration was chosen for the 33 m span and the deck was analysed and designed with a grillage model written for this purpose. The prestressing system was designed and the losses were calculated cable by cable. The as-built bridge was then 'measured' at commissioning, and the design model was updated so that it reproduced these measurements; this updated model is called the digital twin in the rest of the report. The inspection, NDT and monitoring schemes were designed for this bridge. Deterioration was introduced in the twin, and the twin produced the synthetic data from which the AI/ML models were trained. Finally, the models were applied to the bridge at an age of 18 years and the result was used to prepare the maintenance scheme.

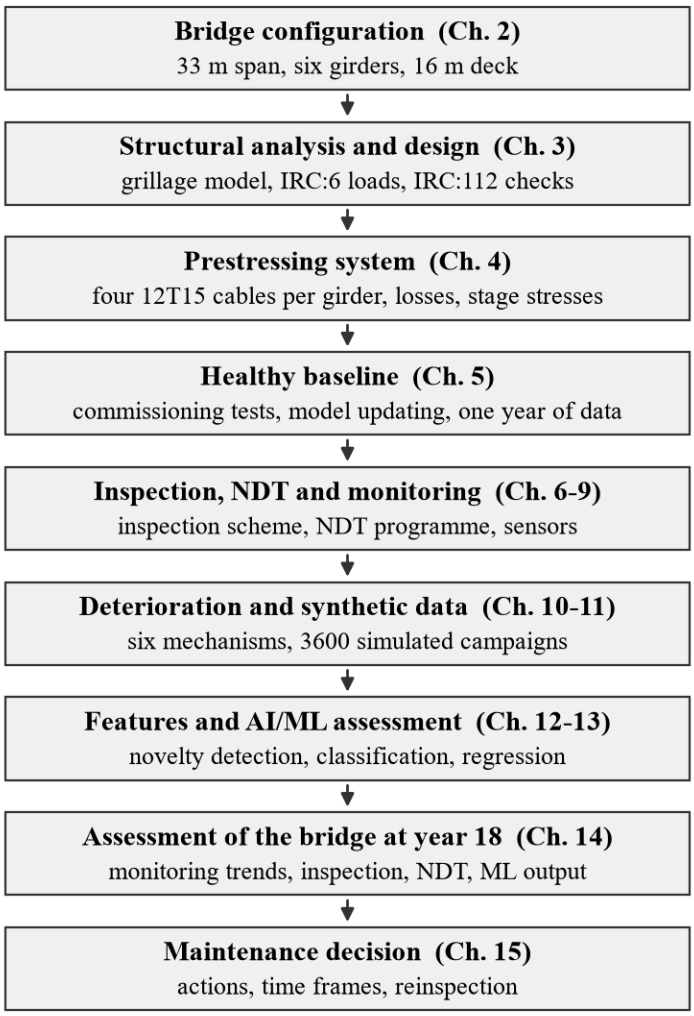


Figure 1: Flow of the study and the chapters in which each step is described

All measurements in this report are synthetic, which the problem statement allows. To make the assessment a fair test, the 'real' bridge used to generate the measurements in Chapters 5 and 14 is a model whose stiffness parameters and deterioration history I kept hidden from the assessment. The twin had to identify the parameters from the measurements, and the assessment had to find the deterioration from the data, in the same way as it would have to on an actual bridge.

1.3 Assumed site and service conditions

No site is specified in the problem, so I assumed one to make the later choices definite. B33 carries a one-way, three-lane carriageway of a divided state highway (one of two parallel bridges) over an irrigation canal and a service road in the coastal plain of West Bengal, about 120 km from the Bay of Bengal. It has three simply supported spans of 33 m on wall-type piers P1 and P2 and abutments A1 and A2. Only one span length is used; span S2, between the two piers, is the span that is designed, instrumented and assessed in detail.

The effective bridge temperature varies between about 15 and 42 °C. The monsoon brings heavy rain from June to September and the deck goes through wetting and drying for the rest of the year. The exposure has therefore been taken as *severe* in the IRC:112 classification, with a clear cover of 50 mm to the links and 75 mm to the ducts. The design life is 100 years. Traffic is mixed, with a high proportion of loaded three-axle and multi-axle lorries.

The piers, abutments and foundations are outside the scope of the design and appear only in the inspection scheme. Scour, seismic and wind design and the shop drawings of the prestressing system are also not covered.

1.4 Codes and standards

Table 2: Codes and standards used

Document	Used for
IRC:5-2015	carriageway, footpath and kerb widths
IRC:6-2017	dead loads, Class A and Class 70R vehicles, impact, footway loading, multi-lane reduction, temperature, load combinations
IRC:112-2020	materials, prestress losses, stress limits, crack control, flexure and shear at the ultimate limit state, deflection
IRC:83 (Part II)-2018	laminated elastomeric bearings
IRC:SP:69-2011	expansion joints
IRC:SP:51-2015	load testing of bridges
IRC:SP:35-1990, IRC:SP:52-1999	inspection and maintenance practice
IRC:SP:40-2019, IRC:SP:80-2008	repair and strengthening techniques; corrosion monitoring and remedial measures
IS 516 (Part 5), ASTM C876	ultrasonic pulse velocity and rebound hammer tests; half-cell potential

1.5 Software

I did all the calculations with Python programs written for this study, using only the numpy, scipy and matplotlib libraries. The machine-learning methods (random forest, logistic regression, Gaussian-process regression, k-means, Gaussian mixture and the Mahalanobis novelty detector) were also coded directly with numpy and scipy, because I could not install the usual library (scikit-learn) on my computer. Appendix A lists the program files.

2 Bridge Configuration

2.1 Cross-section

The carriageway is 11.0 m wide, which provides three lanes of 3.5 m and marginal strips of 0.25 m. It is bounded on each side by a 0.5 m New Jersey type crash barrier. Outside each barrier there is a 1.75 m footpath and a 0.25 m railing kerb, so that the overall width of the deck is 16.0 m (Figure 2). The footpath is slightly wider than the minimum of 1.5 m in IRC:5 because it also carries ducts for power and optical-fibre cables. Placing the barrier between the traffic and the footpath protects pedestrians on a road used by fast heavy vehicles and keeps vehicles off the deck cantilever.

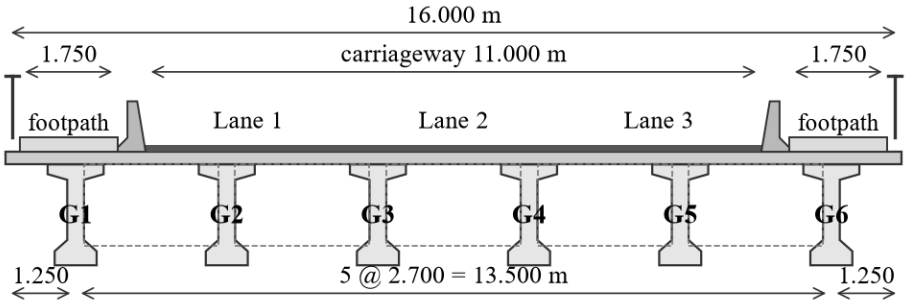


Figure 2: Cross-section of B33 at mid-span (dimensions in m). The deck slab is 225 mm thick (M40) and the precast girders are 1.80 m deep (M45); the mid-span cross girder behind the section is shown dashed.

2.2 Number and spacing of girders

The construction depth is limited, because the deck has to clear the service road below and the approach embankments are already high. The depth of the precast girder was therefore fixed at 1.80 m, i.e. 2.025 m with the slab and a span-to-depth ratio of 16.3. With the depth fixed, the number of girders decides how much prestress each girder has to carry. Table 3 compares four, five and six girders on a preliminary basis: Courbon's distribution, the same section shape, and the prestress needed for zero tension at the soffit under the characteristic load combination.

Table 3: Comparison of girder arrangements at a depth of 1.80 m (preliminary)

Girders	Spacing (m)	Slab (mm)	Courbon factor, outer girder	LL moment, outer girder (kN m)	P_e needed (MN)	Strands per girder	12T15 cables	Mass of one girder (t)	Concrete in deck (m³)
4	4.00	275	0.368	3618	9.67	63.5	6 (too many)	83	279
5	3.25	250	0.297	2918	8.04	52.8	5 (too many)	81	294
6	2.70	225	0.250	2457	6.78	44.5	4	77	304

With four girders each girder would need about 64 strands, i.e. six 12T15 cables. Six ducts cannot be placed in a 750 mm bottom bulb with the required spacing and cover, and the deck slab would have to span 3.0 m between the flanges. Five girders need about 53 strands, or five cables, which is still too many for the bulb at this depth. Six girders need about 45 strands, which four 12T15 cables (48 strands) provide. The six-girder arrangement uses about 5 % more strand and 9 % more concrete than four girders, but it works within the depth limit, allows a 225 mm slab with a clear span of 1.7 m and a cantilever of 1.25 m, keeps each girder below 80 t for lifting by two cranes, and provides more load paths if one girder is damaged. I therefore adopted six girders at 2.70 m. The last point also has a consequence for monitoring: a deck with six girders sheds load from a weakened girder to its neighbours, which keeps it safe but also makes local damage harder to detect from global measurements.

2.3 Girder section

The precast girder (Figure 3) has a 1000 × 175 mm top flange with a 100 mm taper, a 300 mm web and a 750 × 250 mm bottom bulb with a 200 mm taper. I chose a 300 mm web instead of the usual 250 mm so that a 92 mm HDPE duct can pass through it with enough cover. The bulb width is set by three ducts side by side at a clear spacing larger than the duct diameter. Over 1.5 m at each end the web is widened to the full bulb width (end block) and then tapers back over a further 1.5 m, to hold the four anchorages and resist the high shear near the bearings.

The section properties are A = 0.855 m², y_b = 0.912 m and I = 0.3272 m^4 for the precast girder, and I = 0.6711 m^4 (outer) and 0.6790 m^4 (inner) for the composite girder, with the M40 slab transformed by the modular ratio m = 0.971. For a 33 m span the effective-width rule of IRC:112 gives more than the girder spacing, so the full slab width between girders is effective.

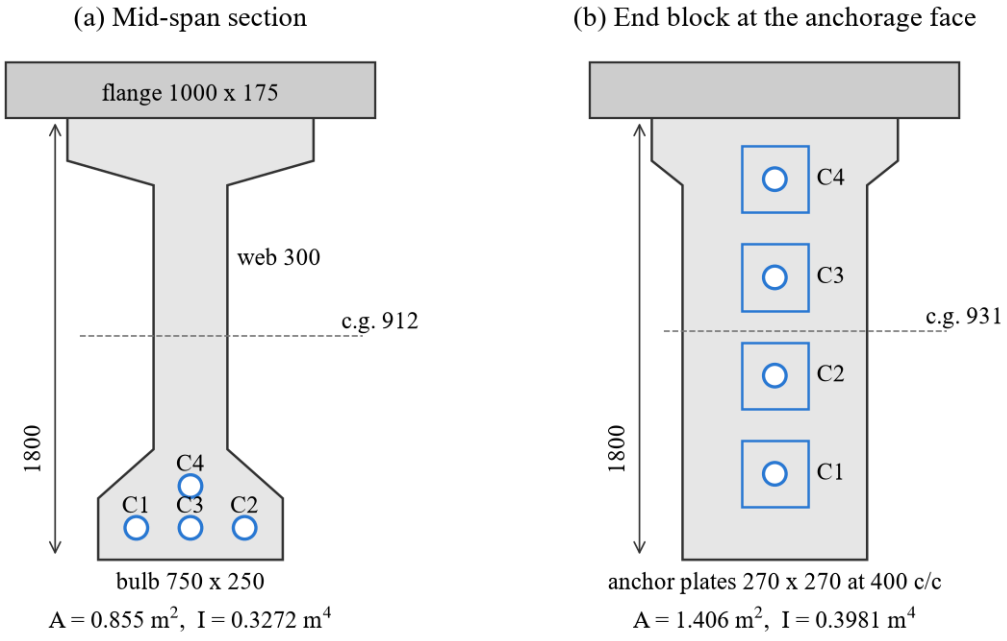


Figure 3: Precast girder at mid-span and at the anchorage face, showing the ducts and the anchor plates of the 12T15 cables (dimensions in mm)

2.4 Deck slab, cross girders and diaphragms

The deck slab is 225 mm thick and spans 1.7 m between the girder flanges; it was checked separately for the wheel loads of the 70R vehicle. End diaphragms 400 mm wide and 1600 mm deep hold the girder ends, transfer transverse loads to the bearings and serve as jacking beams when the bearings have to be replaced. For the intermediate cross girders, one cross girder at mid-span was compared in the grillage model with three cross girders at the quarter points. The two additional cross girders changed the live-load moment of the outer girder by less than 3 % and the first two natural frequencies by about 1 %, so a single 300 × 1450 mm cross girder at mid-span was adopted. It also braces the girders laterally while the deck slab is cast.

2.5 Bearings and expansion joints

Each girder rests on a 400 × 500 mm laminated elastomeric bearing at both ends, with five internal elastomer layers of 12 mm. With elastomeric bearings at both ends the span expands about its centre and both ends move. Strip-seal expansion joints (IRC:SP:69) with a 40 mm gap are provided at each pier and abutment. The joint at a pier is the place where water can reach the bearings, the girder ends and the anchorages, and it becomes the central issue of the assessment in Chapter 14.

2.6 Materials

Table 4: Materials

Item	Specification
Precast girders	M45; first cables stressed at 36 MPa (about 10 days)
Deck slab, cross girders, diaphragms	M40
Reinforcement	Fe500D
Prestressing steel	15.2 mm seven-wire low-relaxation strand (IS 14268, Class 2), f_{pk} = 1860 MPa, 140 mm², E_p = 195 GPa
Ducts	corrugated HDPE, 92 mm outer diameter
Unit weights (IRC:6)	25 kN/m³ for concrete, 22 kN/m³ for the 75 mm bituminous wearing coat

3 Structural Analysis and Preliminary Design

3.1 Loads

Table 5: Loads acting on one span

Load	Value	Basis
Self-weight of girder	21.4 kN/m (end block 35.2 kN/m)	carried by the precast girder
Wet deck slab, cross girder	15.2 kN/m per inner girder, 14.6 kN/m per outer girder; cross girder 26.1 kN at mid-span	carried by the precast girders, tributary widths
Crash barrier, footpath, railing	7.3, 6.0 and 1.5 kN/m on each side	composite deck (grillage)
Wearing coat	1.65 kN/m² over 11.0 m	75 mm at 22 kN/m³
Footway live load	2.78 kN/m²	IRC:6, Eq. (1)
Vehicles	Class A train; Class 70R wheeled (1000 kN) and tracked (700 kN)	IRC:6; three lanes: one 70R and one Class A, or three Class A
Impact factor	0.115 for Class A and 70R wheeled; 0.10 for 70R tracked	IRC:6, Eq. (2)
Multi-lane reduction	10 % when three lanes are loaded	IRC:6
Temperature difference	positive 17.8 / 4.0 / 2.1 °C; reverse 10.6 / 0.7 / 0.8 / 6.6 °C	IRC:6 profiles, $\alpha = 12 \times 10^{-6}$ /°C
Differential shrinkage	100×10^{-6} between deck and girder; creep factor 0.43	self-equilibrating stresses only

The footway load for spans above 30 m and the impact factor for spans above 12 m were taken from IRC:6 as

$$P' = P - 260 + \frac{4800}{L}\left(\frac{16.5 - W}{15}\right) \quad \text{kg/m}^2 \tag{1}$$

$$I_{\text{impact}} = \frac{4.5}{6 + L} \tag{2}$$

where P = 400 kg/m², W = 1.75 m is the width of the footway and L = 33 m. This gives P' = 283 kg/m² (2.78 kN/m²) and an impact factor of 0.115.

3.2 Load combinations

The load combinations follow Annex B of IRC:6. For the ultimate limit state the partial factors are 1.35 on self-weight and superimposed dead load, 1.75 on the wearing coat and 1.5 on traffic. For the serviceability checks the rare (characteristic) combination uses factors of 1.0 on live load and 0.6 on temperature, the frequent combination 0.75 and 0.5, and the quasi-permanent combination zero live load and 0.5 on temperature.

3.3 Grillage model

The composite deck was analysed with a grillage of six longitudinal members along the girder lines, with the properties of the composite girders, and transverse members every 1.375 m representing strips of the deck slab. Following Hambly, the slab strips were given $I = bt^3/12$ and a torsion constant $J = bt^3/6$, and they were replaced by T-beams at the cross girders. Each node has a vertical displacement and two rotations. The torsion constant of a girder was taken as the sum of the values for its flange, web and bulb, plus half the slab contribution. The bearings were modelled as vertical springs of 1.6×10^6 kN/m. A load between girder lines was shared between the four surrounding nodes, and a load outside the outer girders (barrier, footpath) was applied as a force and a torque on the outer girder line.

For live load, influence surfaces of bending moment and shear were calculated at 13 sections of each girder. Each vehicle was moved along the span in steps of 0.25 m and across the carriageway in steps of 0.05 m. The worst transverse arrangement of vehicles was found by a search that respects the IRC clearances: 1.2 m from the kerb for the 70R vehicle, 0.15 m for Class A, and 1.2 m between vehicles. The self-weight of the girders and of the wet slab acts on each precast girder separately and was calculated as for a simply supported beam with 0.45 m overhangs.

As an independent check, the live-load share of the outer girder was also calculated by Courbon's method, which assumes a rigid cross-section in the transverse direction:

$$R_i = \frac{\sum W}{n}\left(1 + \frac{n\,e\,x_i}{\sum_j x_j^2}\right) \tag{3}$$

where $n = 6$ is the number of girders, x_i the distance of girder i from the deck centreline and e the eccentricity of the resultant vehicle load (1.57 m for a 70R vehicle at the kerb clearance with a Class A train beside it).

3.4 Checks on the model

With a uniform load of 10 kN/m on each girder, the sum of the mid-span moments of the grillage is within 0.3 % of $wL^2/8$, and the deflection of an inner girder is within 0.2 % of $5wL^4/384EI$ plus the compression of the bearings. For live load, Courbon's method is applicable here (span/width = 2.06, stiff cross girders) and gives 2457 kN m for G1, against 2426 kN m from the grillage (Figure 4). For the inner girders the grillage gives larger moments than Courbon's method, because a vehicle near the centre of the deck loads G3 and G4 more than a rigid deck would. The grillage values were used for design.

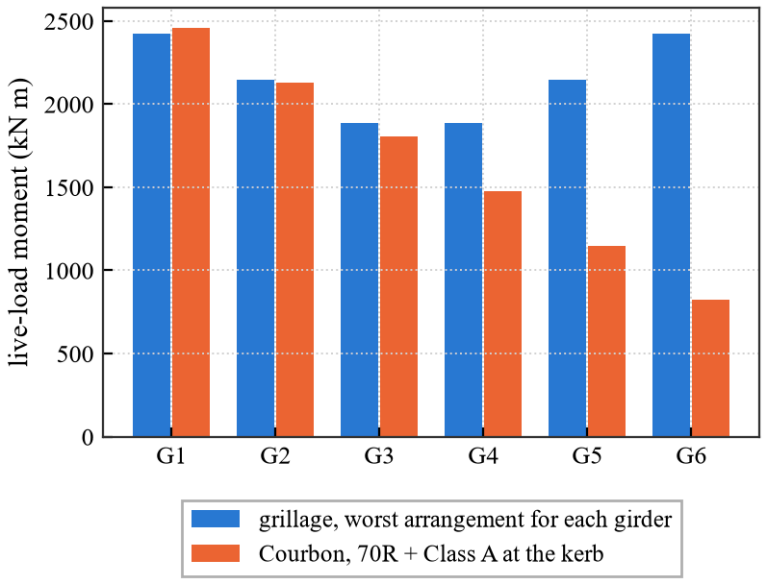


Figure 4: Live-load moment at mid-span of each girder (with impact and lane reduction): grillage and Courbon's method

3.5 Load effects

Table 6: Bending moments at mid-span (G4 to G6 are symmetric to G3 to G1)

Mid-span moment (kN m)	**G1 (outer)**	**G2**	**G3**
Self-weight of girder	2930	2930	2930
Deck slab and cross girder	2097	2281	2281
Crash barrier, footpath, railing	628	716	667
Wearing coat	420	400	413
Vehicles with impact, and footway load	2719	2419	2098
Ultimate design moment M_{Ed}	12,446	12,329	11,805

For G1 the worst case is a 70R wheeled vehicle at the kerb clearance with a Class A train beside it; for the inner girders it is the same pair of vehicles placed over them. The outer girder has the largest live-load moment, while the inner girders carry more slab weight. In the end the ultimate moments of G1 and G2 differ by less than 1 %, so a single girder design was used for all six girders. The envelopes for G1 are shown in Figure 5.

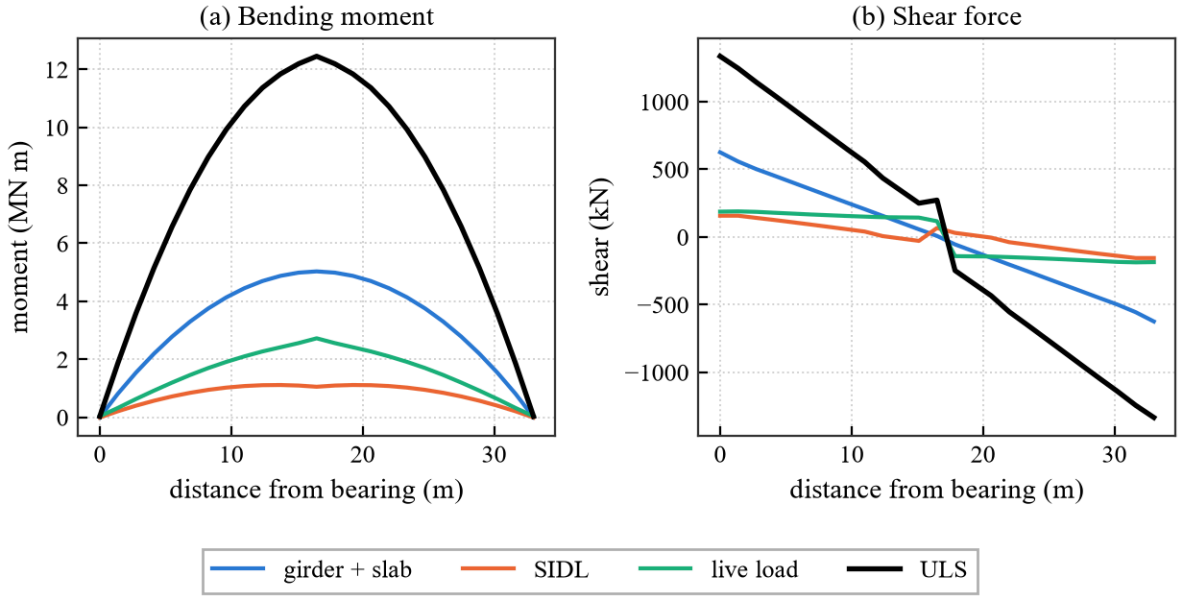


Figure 5: Bending moment and shear force envelopes of girder G1

4 Prestressing System

4.1 Cables and jacking force

Each girder has four cables of twelve 15.2 mm strands (12T15, A_p = 1680 mm² per cable) in 92 mm corrugated HDPE ducts. The cables are stressed from both ends to 0.75 f_{pk} = 1395 MPa, i.e. 2344 kN per cable. This is below the maximum allowed by IRC:112 and also below the value of 0.765 f_{pk} used in earlier practice, which leaves some room for over-stressing if the friction on site turns out to be higher than assumed.

4.2 Cable layout and profiles

The cable layout was fixed by checking the position of every duct along the whole girder, not only at mid-span. At the anchorage face the four anchor plates are placed one above the other in the plane of the web, at 0.35, 0.75, 1.15 and 1.55 m above the soffit and 400 mm apart. The centroid of the group (0.95 m) then coincides with the centroid of the end block (0.93 m). At mid-span three cables lie in the bottom row at 130 mm and one in a second row at 300 mm (Figures 3 and 6).

The two outer cables of the bottom row also have to move sideways by 220 mm, which is not possible inside a 300 mm web. In my first layout these cables moved sideways while they were still in the web; this was found when the cover to the ducts was checked along the girder. In the final layout these two cables drop into the bulb within the first 5 and 8 m (parabolas ending at those points) and move sideways only once they are inside the bulb. The two centre cables follow parabolas over the full half-length and stay in the plane of the web. Each profile is a parabola from the anchorage with a horizontal tangent where it reaches its mid-span level, and

is straight beyond that point. An allowance of 12 mm was made for the strands lying low in a draped duct.

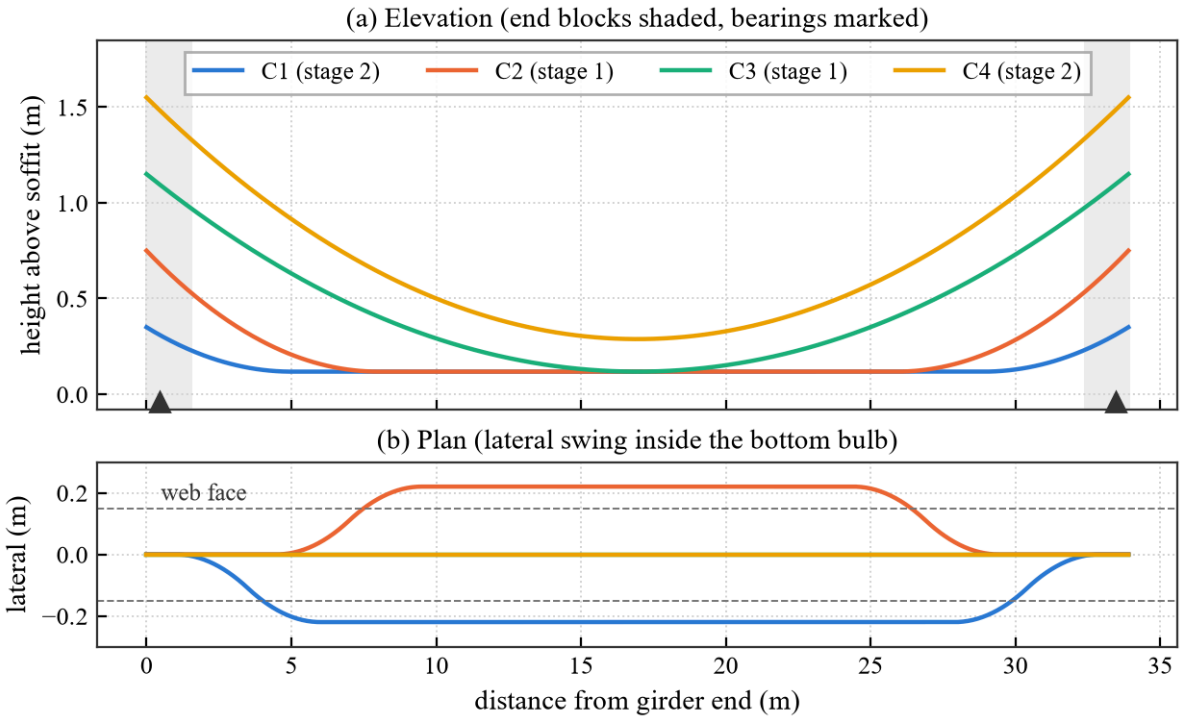


Figure 6: Cable profiles in elevation and in plan. Cables C2 and C3 are stressed at 10 days, C1 and C4 at 28 days.

4.3 Stressing sequence

If all four cables were stressed at 10 days, the soffit compression at mid-span would be about 18.6 MPa, against an allowable value of 0.48 f_{cj} = 17.3 MPa at that age. The cables are therefore stressed in two stages: C2 and C3 at 10 days, which is enough to lift the girder off the casting bed and carry its own weight, and C1 and C4 at 28 days. Both pairs have their centroid at the centroid of the end block, so the girder ends are not bent at either stage.

4.4 Losses of prestress

The force after friction at a distance x from the nearer anchorage is

$$P(x) = P_j \, e^{-(\mu\theta + kx)} \tag{4}$$

where θ is the cumulative vertical and horizontal angle change of the cable from the anchorage, μ = 0.17 and k = 0.002 /m for HDPE ducts. The draw-in of 6 mm at the anchorage affects a length l_s found from the condition that the area between the force profiles before and after the slip equals the slip times the axial stiffness of the cable:

$$2\int_0^{l_s} [P(x) - P(l_s)]dx = \Delta_s \, E_p A_p \tag{5}$$

The loss due to elastic shortening was calculated cable by cable in the order of stressing (C2, C3, C1, C4), using the modulus of the concrete at the age of each stressing. When cable i is stressed, every cable j already anchored loses

$$\Delta P_j = \frac{E_p}{E_c(t_i)} A_{p,j} \left(\frac{P_i}{A} + \frac{P_i \, e_i \, e_j}{I} \right) \tag{6}$$

The long-term loss due to creep, shrinkage and relaxation was obtained from the expression given in IRC:112 (of the same form as Eq. 5.46 of EN 1992-1-1):

$$\Delta\sigma_{p,\,c+s+r} = \frac{\varepsilon_{cs} E_p + 0.8\,\Delta\sigma_{pr} + \dfrac{E_p}{E_{cm}}\,\varphi(t, t_0)\,\sigma_{c,\,QP}}{1 + \dfrac{E_p}{E_{cm}} \dfrac{A_p}{A_c} \left(1 + \dfrac{A_c}{I_c} z_{cp}^2 \right) [1 + 0.8\,\varphi(t, t_0)]} \tag{7}$$

The creep coefficient and the shrinkage strain were calculated from the expressions in Annex A2 of IRC:112 for a relative humidity of 70 %, a notional size of 281 mm and a cylinder strength taken as 0.8 times the cube strength. The quasi-permanent concrete stress at the level of the tendons is 10.8 MPa at mid-span. The final relaxation was taken as three times the 1000-hour value for the actual initial stress ratio. The results at mid-span are given in Table 7.

Table 7: Prestressing forces and losses at mid-span of one girder

Cable	Stressed at (days)	P_j (kN)	Friction + draw-in (kN)	Elastic shortening (kN)	P_0 (kN)	$\varphi(\infty, t_0)$	Relaxation (MPa)	Long-term loss (MPa)	P_e (kN)
C1	28	2344	179	57	2107	1.63	80	170	1821
C2	10	2344	202	191	1951	1.99	47	168	1668
C3	10	2344	124	122	2098	1.99	78	187	1784
C4	28	2344	134	0	2210	1.63	104	186	1898
Total		9374	639	370	8366				**7172**

The immediate loss at mid-span is 10.8 % and the long-term loss a further 12.7 %, which gives P_0 = 8.37 MN, P_e = 7.17 MN and P_e/P_j = 0.765. A total loss in the low twenties of per cent is normal for a post-tensioned girder of this length, so I took this as a first check on the calculation. Cable C2 loses the most to elastic shortening because three cables are stressed after it. Figure 7 shows the force along the girder; the draw-in of the cables with straight central portions extends almost to mid-span because the only friction there is the wobble term.

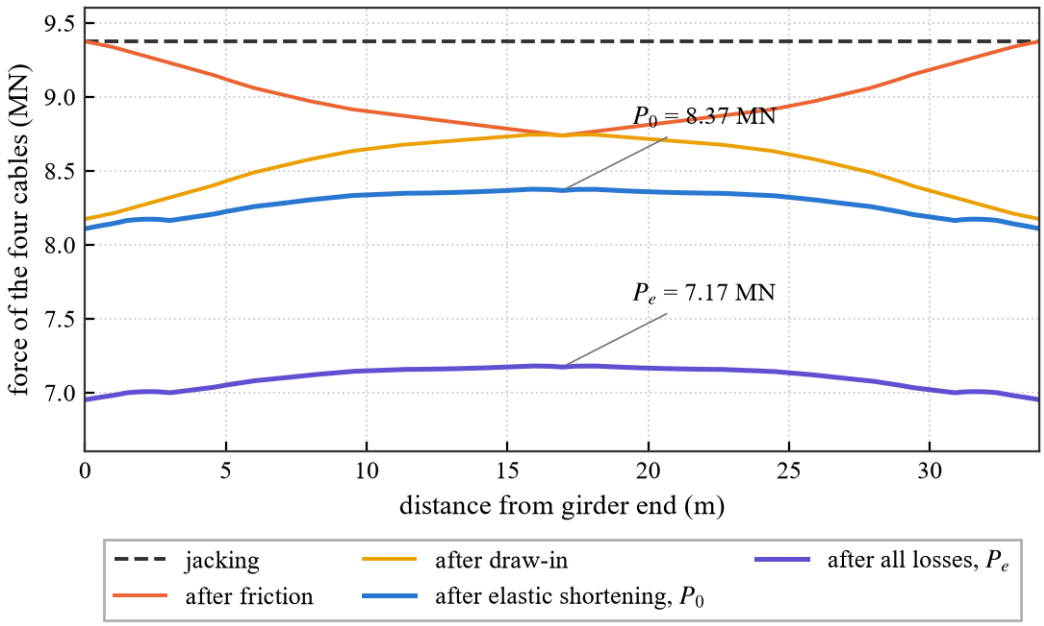


Figure 7: Total prestressing force of one girder along its length at successive stages

4.5 Stresses at the important stages

The stresses were checked at mid-span, at L/4 and at two sections near the support of every girder, for five stages: transfer of the first two cables (10 days, self-weight only), all cables stressed (28 days), casting of the deck slab (60 days), opening to traffic (90 days) and long-term service in the three load combinations. The stress at the soffit, for example, is

$$\sigma_b = \frac{P}{A} + \frac{P\,e}{Z_b} - \frac{M_g + M_s}{Z_b} - \frac{M_{sidl} + \psi M_q}{Z_{b,c}} + \sigma_T + \sigma_{sh} \tag{8}$$

with compression taken as positive, Z_b and $Z_{b,c}$ the section moduli of the precast and composite sections, ψ the combination factor on live load, and σ_T and σ_{sh} the self-equilibrating stresses from the temperature difference and differential shrinkage, added only where they are adverse. For the service checks the characteristic value of the prestress was used: $0.9P_m$ where prestress is favourable and $1.1P_m$ where it is not.

The design criteria adopted are stricter than the crack-width limits of IRC:112 for bonded prestressed members: no decompression of the soffit under the quasi-permanent combination, soffit tension below f_{ctm} (uncracked section) under the rare combination, and compression below $0.48\,f_{ck}$ under the rare and $0.36\,f_{ck}$ under the quasi-permanent combination.

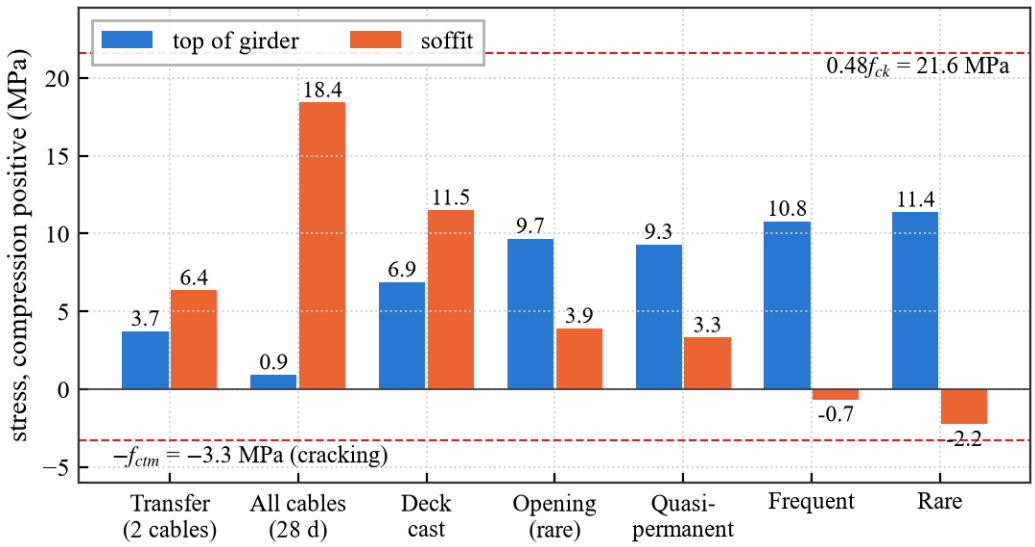


Figure 8: Stresses at mid-span of the outer girder G1 at the construction and service stages (service stages with $0.9P_m$)

Table 8: Summary of stress checks (compression positive)

Check (worst of G1 to G3 and of all sections)	Value (MPa)	Limit (MPa)	Result
Transfer, first stage: maximum compression / minimum stress	6.79 / +2.39	17.28 / ≥ 0	satisfied
All cables stressed: soffit compression	18.42	21.60	satisfied
All cables stressed: top fibre	+0.92	≥ 0 (no tension)	satisfied
Long term, quasi-permanent, soffit ($0.9P_m$)	+2.68	≥ 0 (no decompression)	satisfied
Long term, frequent, soffit ($0.9P_m$)	-0.85	≥ −3.3 (uncracked)	satisfied
Long term, rare, soffit ($0.9P_m$)	-2.27	≥ −3.3 (uncracked)	satisfied
Rare: top of girder / top of slab ($1.1P_m$)	10.40 / 6.48	21.6 / 19.2	satisfied
Quasi-permanent: soffit compression ($1.1P_m$)	8.76	16.2	satisfied

The governing check is the soffit stress at mid-span under the rare combination, -2.27 MPa. The reverse temperature difference alone contributes about 1.5 MPa of tension at the soffit, so the girder would not meet a 'no tension under rare loads' rule; it does, however, remain uncracked with a margin of about 1 MPa. I kept this margin in view because it decides how much prestress the girder can lose before it cracks (Chapter 10).

4.6 Flexure at the ultimate limit state

The moment of resistance at mid-span was found by strain compatibility, with a rectangular stress block of depth 0.8x at $f_{cd} = 0.67\ f_{ck}/1.5$ and a bilinear stress-strain curve for the strand with $f_{pd} = f_{p0.1k}/1.15$, starting from the strain due to P_e. When the neutral axis lies within the slab of effective width b,

$$0.67\frac{f_{ck}}{1.5}\,b\,(0.8x) = A_p f_p, \qquad M_{Rd} = A_p f_p\,(d_p - 0.4x) \tag{9}$$

For G1 this gives x = 252 mm (stress block 201 mm deep, within the 225 mm slab), a strand strain of 28 × 10^{-3} (the strands yield and the failure is ductile, x/d = 0.14) and M_{Rd} = 16,468 kN m, against M_{Ed} = 12,446 kN m. The utilisation is 0.76. The untensioned bottom reinforcement was neglected, which is conservative.

4.7 Shear

The critical section for shear is where the web has just narrowed to 300 mm, 2.75 m from the bearing. Since a duct runs through the web there, the nominal web width is $b_w - 1.2\varphi$ = 190 mm for HDPE ducts. For the worst girder V_{Ed} = 1452 kN, the vertical component of the prestress ($0.9P_e \sin\alpha$) is 532 kN, and the net shear of 921 kN is below $V_{Rd,max}$ = 1329 kN for a strut inclination with $\cot\theta = 2$. The required shear reinforcement is 771 mm²/m. Two-legged 12 mm links at 200 mm (1131 mm²/m) were adopted over the end 6 m, and two-legged 10 mm links at 250 mm elsewhere, which is above the minimum of 183 mm²/m.

4.8 Deflection and camber

The live-load deflection with impact is 11.8 mm for G1, or span/2786, well within the limit of span/800 = 41.2 mm. The upward camber is 37 mm when all the cables have been stressed and about 11 mm after the deck slab has been cast. The elastic camber due to P_e alone is 57 mm. This value is used again in Chapter 10, because a loss of prestress shows up as a loss of this camber.

4.9 Bearings

The largest bearing reaction is 1222 kN, at an inner girder, with a permanent reaction of 794 kN. For the 400 × 500 mm bearing with five 12 mm layers the shape factor is 9.0. The total design strain due to compression, shear (a movement of 14 mm from creep, shrinkage and temperature) and rotation is 1.84, below the limit of 7 in IRC:83 (Part II), and the minimum pressure of 4.2 MPa is above 3 MPa, so the bearing will not creep out of position. In service each bearing shears by about 0.192 mm per °C, i.e. αL/2; this is the quantity watched by the bearing displacement transducers (Chapter 8).

4.10 Anchorage zones and other details

The end block was sized for the anchor plates (spacing 400 mm, edge distance 250 mm at the top) and for the bursting forces in the local zones. The final anchorage reinforcement has to follow the approval document of the prestressing system actually used. The deck slab was designed separately for the 70R wheel loads on its 1.7 m clear span; these local designs do not affect the later chapters and are not repeated here.

5 Healthy Baseline

5.1 Need for a measured baseline

The healthy baseline cannot simply be taken from the design calculation. A bridge as built always differs somewhat from the design: the concrete is usually stiffer than the code value of the modulus, crash barriers and footpaths add stiffness, and bearings are not ideal. Later measurements have to be compared with the bridge as it was measured when new, and with a model that reproduces those measurements. The baseline was therefore set up in three steps: commissioning tests, updating of the model, and one year of monitoring of the healthy bridge.

5.2 Commissioning tests

Before the bridge was opened, a 30-minute ambient vibration test was recorded at night with all 12 accelerometers, and a static load test was carried out with four 300 kN three-axle lorries (two side by side and two in tandem, centred at mid-span) following the approach of IRC:SP:51. In this study the 'real' bridge is a model in which the concrete modulus is 6 % above E_{cm}, the crash barriers act with about one-third of their stiffness and the dynamic modulus is 24 % above the static modulus. I did not use these values anywhere in the assessment.

The commissioning record was identified without using any mode shapes from the model, by frequency domain decomposition (FDD) of the 12 channels (Figure 9). The cross-spectral matrix of the channels was computed at every frequency line and decomposed by singular value decomposition; peaks of the first singular value were picked, each peak was named after the design-model mode that its singular vector resembled most, and the frequency was refined by fitting a single-degree-of-freedom spectrum around the peak (Section 9.4).

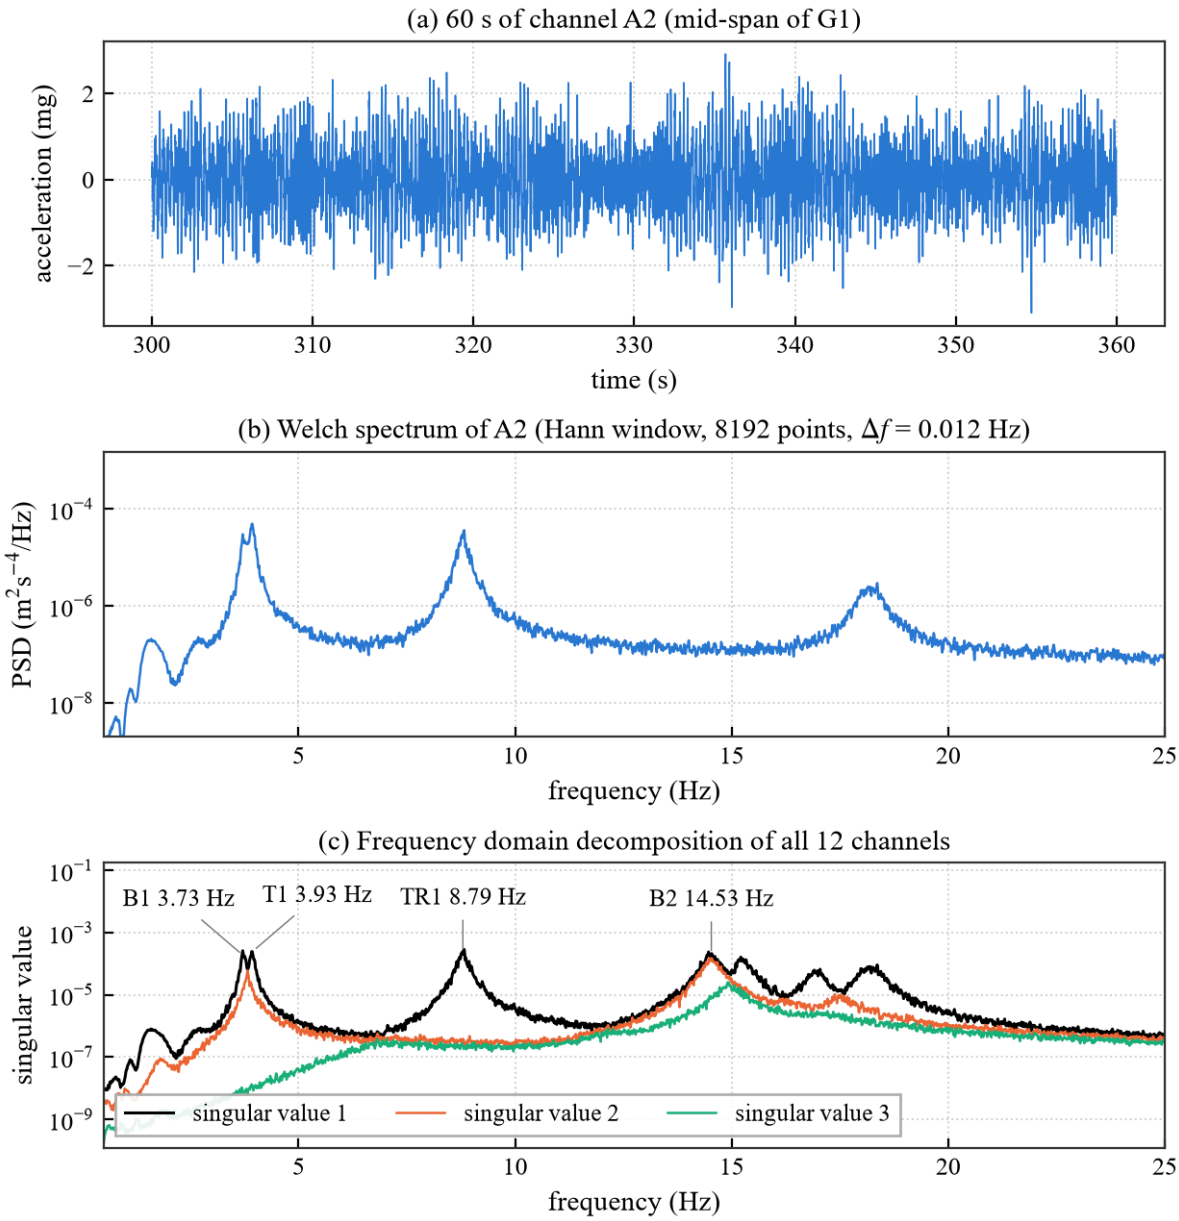


Figure 9: Commissioning ambient vibration test: one channel in the time and frequency domains, and the singular values of the cross-spectral matrix of all 12 channels

At first I identified the frequencies by filtering the channels with the mode shapes of the design model. This gave f_2 = 3.78 Hz, whereas the model-free FDD gave 3.93 Hz. With the first bending and torsion modes only 5 % apart, the design-model shapes let one mode leak into the other. From this I learnt that a model which has not yet been checked against the structure should be used only to name the modes, and not to process the data.

5.3 Model updating

Three parameters of the model were updated: a factor on the concrete modulus (E_{scale}), the share of the crash-barrier stiffness acting with the deck (β) and the ratio of dynamic to static modulus (E_{dyn}). They were found by minimising

$$J(\theta) = \sum_{k=1}^{4} \left(\frac{f_k(\theta)/f_k^m - 1}{0.002} \right)^2 + \sum_{i=1}^{6} \left(\frac{\delta_i(\theta) - \delta_i^m}{0.10\ \text{mm}} \right)^2 \tag{10}$$

over the four identified frequencies f_k^m and the six measured mid-span deflections δ_i^m, with weights equal to the expected measurement errors (0.2 % and 0.10 mm).

Table 9: Design model, commissioning measurements and the updated model (digital twin)

Quantity	Design model	Measured (year 0)	Updated twin
f_1, first bending (Hz)	3.466	3.730	3.731
f_2, first torsion (Hz)	3.562	3.926	3.922
f_3, first transverse (Hz)	8.345	8.794	8.793
f_4, second bending (Hz)	13.168	14.530	14.540
Load-test deflection G1 / G3 (mm)	4.99 / 6.90	4.36 / 6.32	4.40 / 6.34
E_{scale}	1.00	–	1.055 ± 0.008
β	0	–	0.36 ± 0.02
E_{dyn}	1.20	–	1.245 ± 0.010

The design model is 7 to 10 % too soft in frequency and 9 to 14 % too flexible in the load test, which is normal for a design model. After updating, the twin reproduces all ten measurements within 0.2 % in frequency and 0.15 mm in deflection, and the measured and twin mode shapes agree with MAC values above 0.99 for the first three modes. The updated parameters are close to the hidden values (1.06, 0.35, 1.24), but I still treat the twin as a calibrated model and not as the true structure, since E_{scale} and β are correlated (correlation coefficient -0.29) and a somewhat different pair could fit almost as well. The second bending mode at 14.5 Hz nearly coincides with the second torsion mode, and its measured shape is a mixture of the two (MAC 0.47); for this mode the twin shape was used in the later signal processing.

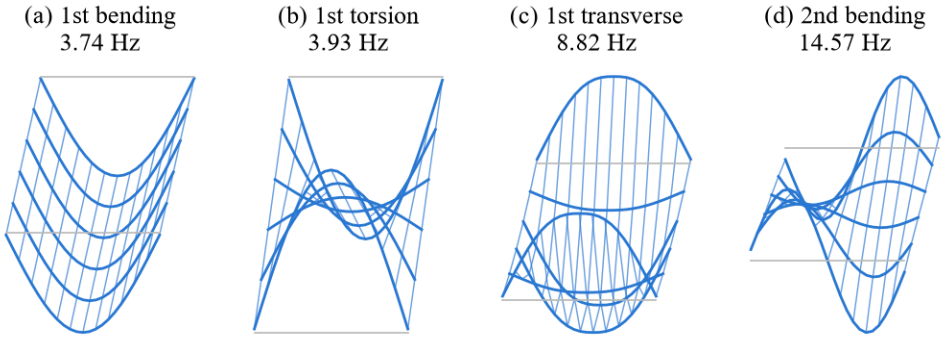


Figure 10: First bending, torsion and transverse modes and the second bending mode of the updated twin at 25 °C

5.4 One year of healthy monitoring

The permanent monitoring system then recorded two 30-minute records a day for a year, at 02:00 and 14:00, giving 730 records. Over the year the first bending frequency varied between 3.65 and 3.79 Hz, a range of almost 4 %. The causes are the temperature (-0.149 %/°C, mainly through the modulus of concrete), the traffic present during the record and the extra mass of a wet deck in the monsoon. For each frequency a linear model in the temperature T and the logarithm of the RMS acceleration (a measure of how busy the bridge was during the record) was fitted:

$$\hat{f}_k = \beta_{0k} + \beta_{1k}(T - 25) + \beta_{2k} \ln a_{RMS} \tag{11}$$

After this normalisation the scatter of f_1 is 7.0 mHz (0.19 %) (Figure 11). The remaining pattern in the residuals is the effect of the monsoon on the mass. I did not remove it, because on a real bridge its size would not be known in advance.

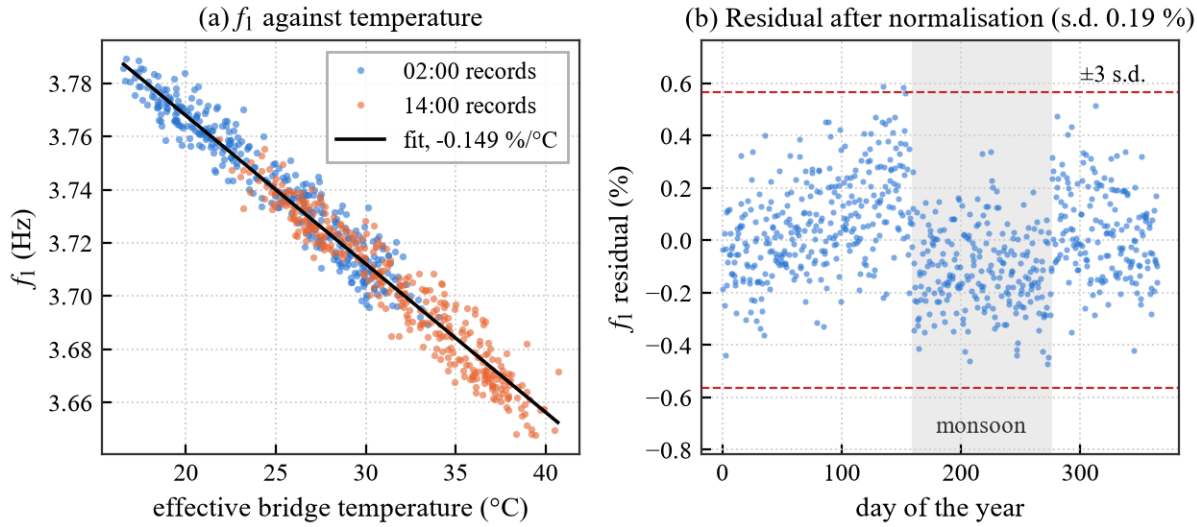


Figure 11: One year of healthy monitoring: first bending frequency against temperature, and the residual after temperature and traffic normalisation

Table 10: Baseline structural and monitoring data of the healthy bridge

Baseline quantity (span S2, healthy, reference temperature 25 °C)	**Value**
Effective prestress per girder at mid-span	P_e = 7.17 MN; soffit precompression due to P_e 23.4 MPa
Soffit stress, quasi-permanent combination (mean prestress)	about 5.7 MPa compression (G1)
Load test (4 × 300 kN): mid-span deflection of G1, G2, G3	4.38 / 5.54 / 6.31 mm
Load test: soffit strain of G1, G2, G3	60 / 70 / 66 με
Natural frequencies f_1 to f_4	3.741 / 3.932 / 8.815 / 14.572 Hz
Temperature sensitivity of f_1 to f_4	-0.15 / -0.14 / -0.14 / -0.13 %/°C

Baseline quantity (span S2, healthy, reference temperature 25 °C)	Value
Scatter after normalisation, f_1 to f_4	0.19 / 0.17 / 0.16 / 0.16 %
Acceleration at mid-span	0.6 to 0.8 mg RMS at night; 1.3 to 1.5 mg RMS in daytime traffic; peaks 10 to 25 mg
Bearing movement	0.192 mm/°C at both ends
NDT on girders, year 1 (mean ± s.d.)	rebound 42.0 ± 2.2; UPV 4.56 ± 0.07 km/s; cover 53 ± 5 mm; HCP -133 ± 30 mV; resistivity 50 ± 10 kΩcm

All later measurements are compared with this table and with the normalisation models of Eq. (11), not with the design calculation. The same 'own baseline' principle is also what allows a model trained on simulated data to be applied to the bridge itself (Chapter 12).

6 Visual Inspection Scheme

Visual inspection is the cheapest source of information about the bridge and, for most of the defects that matter on a bridge of this type (water, corrosion, spalling, bearing and joint problems), also the first. The scheme is organised as Bridge → Span → Component → Location → Observation, so that each record has an address that can be found again at the next inspection.

6.1 Components, locations and defects

Table 11: Inspection hierarchy, locations and items to be inspected

Component	Locations recorded	What is looked for
PSC girders G1 to G6	zones Z1 to Z5 along the span (Z1 and Z5: end zones 0 to 3.3 m with anchorages and bearings; Z2 and Z4: quarter spans; Z3: mid-span); soffit, web faces, anchorage faces	flexural cracks at the soffit (any crack is significant in a fully prestressed girder), longitudinal cracks along ducts, rust staining, spalling, honeycombing, efflorescence, impact damage over the service road
Deck slab	bays between girders, cantilevers, construction joints	cracks, leakage and efflorescence, spalling near drains
Cross girders and diaphragms	end diaphragms A and B, cross girder at L/2	cracks near jacking points, leakage from the joint
Bearings	G1-A to G6-B	bulging, splitting, too much or no shear deformation, debris, corrosion of plates, loss of contact
Expansion joints	EJ-A1, EJ-P1, EJ-P2, EJ-A2	torn or missing seal, debris in the gap, water passing through, noise
Drainage	spouts U-1 to U-6 and D-1 to D-6 in each span	blockage, spouts too short (water running on the girder), broken pipes

Component	Locations recorded	What is looked for
Footpaths, crash barriers, wearing coat	upstream and downstream, lanes	loose cover slabs, cracking of barriers, ravelling and potholes near joints
Pier caps, piers, abutments	P1, P2, A1, A2	leakage stains, spalling of pedestals, cracking, vegetation, signs of scour

6.2 Condition states and condition index

Each observation is given a condition state from 1 to 5 using written rules, so that two inspectors arrive at similar ratings (Table 12). Crack-width bands are stricter for prestressed girders than for reinforced concrete elements, because a flexural crack in a girder designed to remain uncracked means that its precompression has been lost.

Table 12: Condition states used in the inspection

Condition state	Meaning	Crack width, PSC girder	Crack width, RC element	Other examples
CS1 Good	no repair needed	none	< 0.10 mm	–
CS2 Fair	minor defect, monitor	up to 0.10 mm	0.10 to 0.20 mm	efflorescence, minor leakage
CS3 Poor	repair at the next opportunity	0.10 to 0.20 mm	0.20 to 0.30 mm	spalling without exposed steel, rust staining, leaking joint
CS4 Serious	repair soon, check structural effect	0.20 to 0.30 mm	0.30 to 1.0 mm	spalling with exposed bars, restrained bearing
CS5 Critical	immediate action, possibly restriction	> 0.30 mm	> 1.0 mm	exposed strands over a large area

A component takes the worst condition state of its observations. A bridge condition index (BCI) between 0 and 100 is then calculated as a weighted average over the component groups,

$$\mathrm{BCI} = 100 \, \frac{\sum_{c} w_c \, (5 - \mathrm{CS}_c)/4}{\sum_{c} w_c} \tag{12}$$

with weights reflecting the structural importance of each group: 0.30 for the girders, 0.12 each for the deck slab and the bearings, 0.08 each for the joints, piers and pier caps, 0.06 each for the cross girders and abutments, 0.04 for drainage and 0.02 each for footpaths, crash barriers and wearing coat.

6.3 Types and frequency of inspection

Table 13: Inspection regime

Type	When	Scope
Routine inspection	before and after every monsoon	walk-over of the deck, view from the service road and the canal banks with binoculars; drains, joints and bearings visible from the piers
Principal inspection	every three years	close visual inspection of every element from an under-bridge inspection unit; hammer tapping of suspect concrete; NDT at the fixed test areas
Special inspection	after an alarm from the monitoring system, an overload, a flood or a vehicle impact	as needed for the event, by a bridge engineer

6.4 Digital inspection application

I wrote a small web application for the scheme (`inspection_app/index.html`; it runs in any browser without an internet connection). It guides the inspector through span, component, location and observation, suggests the condition state from the crack width or the type of defect (the inspector can change it), stores photographs, keeps the records in the browser and exports them as CSV or JSON. It also draws the worst condition state of every girder zone as a map and calculates the component ratings and the bridge condition index. The year-18 inspection of Chapter 14 is included as an example (Figure 12).

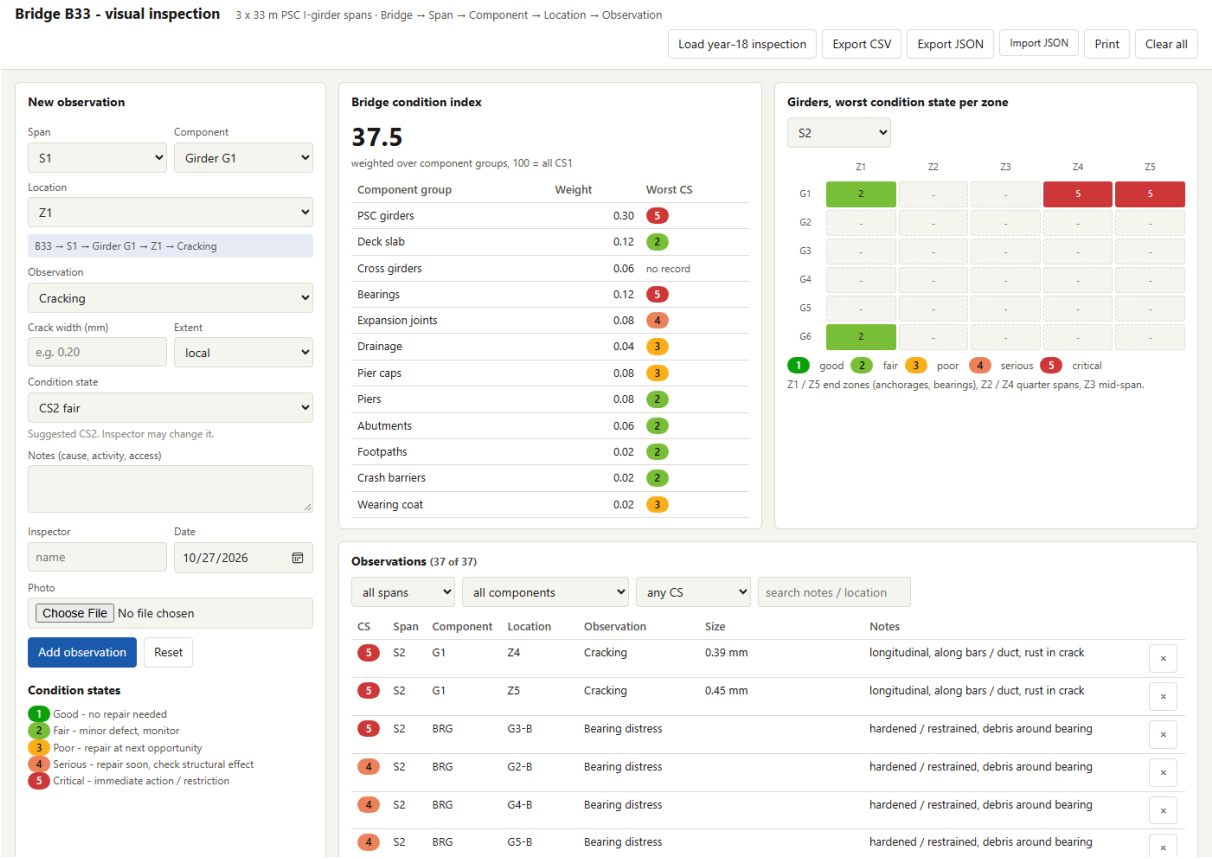


Figure 12: The inspection application with the year-18 inspection loaded: entry form, component ratings and bridge condition index, worst condition state of each girder zone of span S2, and list of observations

7 Non-Destructive Testing Programme

Each test in the NDT programme is chosen to answer a specific question raised by the inspection. The programme for B33 is therefore set out in the order observed defect, engineering question, NDT, measurement, interpretation (Table 14).

Table 14: NDT programme: defect, question, test, measurement and interpretation

Observed defect	Engineering question	NDT	Measurement	Interpretation
Rust staining, spalling, damp patches on the girder soffit	Is the reinforcement corroding, and over what area?	half-cell potential on a 0.5 m grid (ASTM C876); Wenner resistivity	potential (mV vs CSE); resistivity (kΩcm)	below −350 mV corrosion likely, −200 to −350 mV uncertain, above −200 mV low risk; resistivity below 10 kΩcm means fast corrosion is possible. A wet surface also lowers the potential, so both are read together

Observed defect	Engineering question	NDT	Measurement	Interpretation
As above, and areas of low cover	Has carbonation reached the steel? Is the cover as specified?	cover meter; phenolphthalein test on drill holes or small cores	cover (mm), carbonation depth (mm)	carbonation depth at or beyond the cover in wet concrete: the steel is no longer passive
Cracks, honeycombing, surface deterioration	Is the concrete sound through the section? Where are the voids?	ultrasonic pulse velocity across the web and the bulb (IS 516 Part 5/Sec 1)	pulse velocity (km/s)	above 4.40 km/s good, 3.75 to 4.40 medium, below 3.75 doubtful; a local drop across a crack gives its depth
As above	Is the surface concrete weaker?	rebound hammer on a grid (IS 516 Part 5/Sec 4)	rebound number	comparative only; carbonation hardens the surface and raises the rebound; calibrated against a few cores
Rust or leakage at anchorages; cracks along ducts	Are the ducts fully grouted? Are strands corroding inside?	GPR to locate the ducts; impact-echo along the duct line; borescope through a small drilled hole	duct positions, voids, condition of the strands	voids at duct high points and anchorages are the usual places of strand corrosion; half-cell readings do not see strands inside ducts
Sag of a girder; cracks at mid-span	How much prestress is left?	lift-off test at an accessible anchorage, or saw-cut stress release on the soffit with strain gauges	lift-off force (kN); released strain (με)	the only direct measurement of the remaining force; confirms or rejects what the monitoring suggests
Bearing distress	Can the bearing still move and rotate?	bearing displacement against temperature; dimensions and visual check	movement per °C (mm/°C)	much less than αL/2 at one end: restrained bearing

7.1 Test locations

Each girder has five test areas, one in each zone, on the bottom bulb and on the web (on both faces for the outer girders). A span therefore has 30 test areas and the bridge 90. The same areas are used at every inspection so that trends can be followed. Additional half-cell grids and carbonation tests are made at the girder ends next to the joints, under every drain spout of the outer girders, and wherever rust or spalling is found. Investigations of the tendons are limited to the anchorage zones and the high points of the ducts, where voids collect. In the learning data of Chapter 11 the 30 test areas of S2 enter as span-level summaries (lowest UPV, most negative potential and so on); the 90 test areas of the whole bridge are clustered in Chapter 14.

8 Structural Response Measurement

Three response quantities are monitored: displacement, strain and acceleration. Each of them gives information that the other two do not. Table 15 gives the quantities, the sensors and their

locations, the sampling and duration, and how the readings are interpreted. The layout is shown in Figure 13.

Table 15: Structural response measurement: quantities, sensors, sampling and interpretation

Quantity	Sensor and location	Sampling and duration	Interpretation
Displacement in a load test	LVDTs on a reference frame, or a total station with prisms, at mid-span of all six girders	static readings at each load step; at commissioning and at every principal or special inspection	deflection compared with the baseline after correction to 25 °C; the distribution between girders shows which girder has softened
Camber (geometry)	precise levelling points on the kerbs above G1 and G6 and at the deck centreline, at mid-span and supports	once a year, in the same season and at the same time of day	a loss of camber beyond the creep prediction is the clearest sign of loss of prestress (about 1 mm per 1 % loss)
Long-term strain	vibrating-wire gauges cast into the bottom bulb at mid-span of G1, G3, G4 and G6, with thermistors	hourly, permanently; daily averages used	drift towards tension beyond the predicted creep and shrinkage means that precompression is being lost (about 12 με per 1 % loss)
Strain in a load test	electrical resistance or fibre-optic gauges on the soffit at mid-span	100 Hz during the load test	local change of stiffness; a sudden increase means a crack is opening
Bearing movement	displacement transducers across the bearings of G1 and G6 at both ends	every 10 minutes, permanently	slope of movement against temperature, healthy value 0.192 mm/ °C; a decrease at one end with an increase at the other indicates a restrained bearing
Temperature	thermistors in the deck slab, web and bulb at mid-span of G1 and G4	every 10 minutes	effective temperature and gradient, used to normalise all other data
Acceleration	12 vertical accelerometers (Chapter 9)	100 Hz, two 30-minute records a day	frequencies, mode shapes, damping, response to traffic

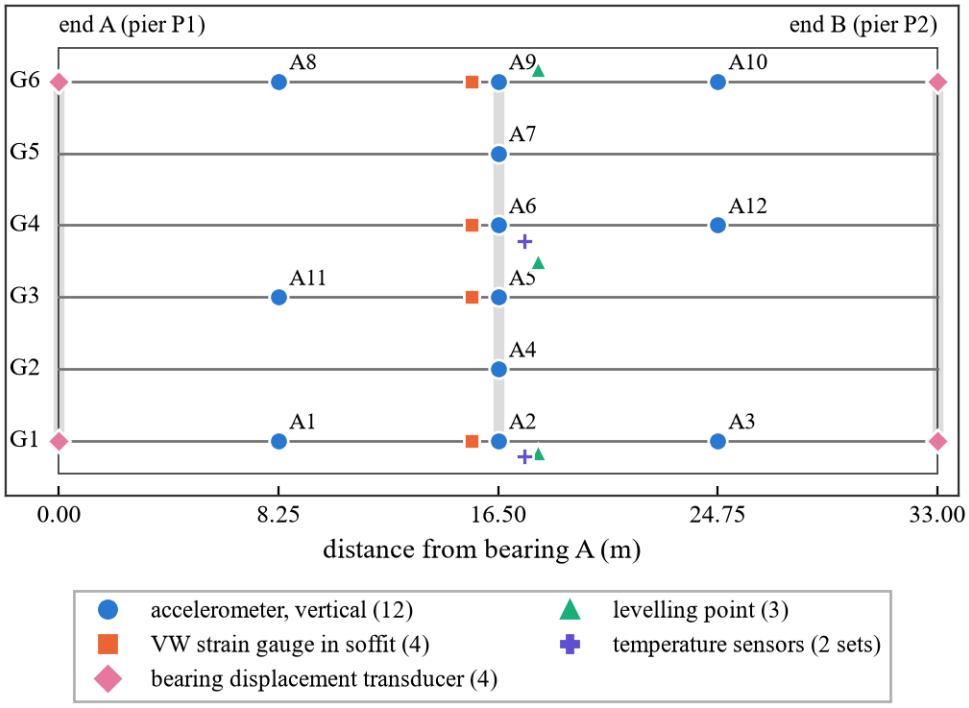


Figure 13: Instrumentation of span S2 in plan. The data logger and a cellular modem are housed in a cabinet on pier P2.

9 Vibration Measurement and Signal Processing

9.1 Number, location and direction of accelerometers

Twelve uniaxial accelerometers measuring the vertical direction are fixed to the soffits of the bottom bulbs (Figure 13): at L/4, L/2 and 3L/4 of both outer girders, at L/2 of the four inner girders, and at L/4 of G3 and 3L/4 of G4. Low-noise force-balance or piezoelectric seismic accelerometers are needed (noise about 2 µg/√Hz including cable and digitiser, range ±0.5 g), because the ambient response at night is only 0.5 to 1 mg RMS; MEMS sensors with a noise of 20 to 25 µg/√Hz would hide the higher modes in noise. Only the vertical direction is measured, since the modes of interest are vertical bending and torsion; the lateral and longitudinal motion of a 33 m span on elastomeric bearings carries little information about the condition of the girders.

My first layout did not work. With the first ten sensors (three on each outer girder and one at mid-span of each inner girder), the AutoMAC matrix of the twin's mode shapes at the sensor positions showed two pairs of modes that could not be distinguished, with MAC = 1.00 (Figure 14). The second bending and second transverse modes both have zero response at mid-span and the same signs at the quarter points of the outer girders, and the same was true of the second torsion mode and a higher transverse mode. The matrix of mode shapes at the sensors was singular (condition number of the order of 10^{12}), so the modes could not be separated. Two additional sensors at the quarter points of the inner girders G3 and G4 reduced the largest off-

diagonal MAC to 0.37 and the condition number to 3.1. The modal assurance criterion used throughout is

$$\mathrm{MAC}(\phi_a, \phi_b) = \frac{\left|\phi_a^{\mathrm{T}} \phi_b\right|^2}{\left(\phi_a^{\mathrm{T}} \phi_a\right)\left(\phi_b^{\mathrm{T}} \phi_b\right)} \tag{13}$$

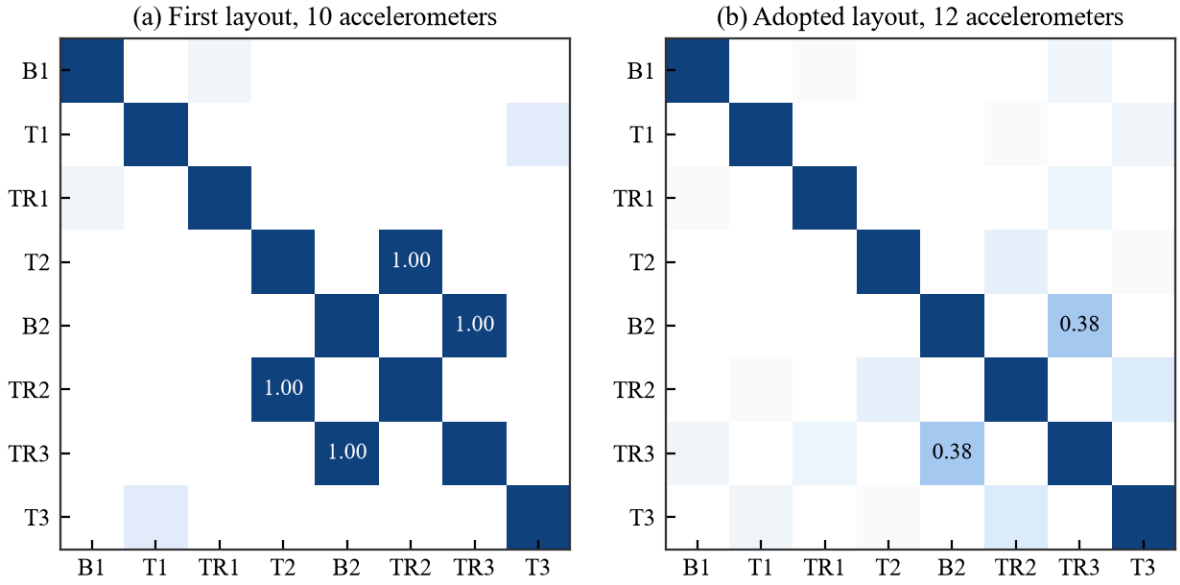


Figure 14: AutoMAC of the first eight modes of the twin at the sensor positions, for the first and the adopted layouts

9.2 Sampling frequency and duration

The data loggers sample at 1 kHz with a hardware anti-alias filter and decimate the signals to 100 Hz, so that the modes up to about 20 Hz lie well inside the usable band of 40 Hz. A record lasts 30 minutes, i.e. more than 6000 cycles of the first mode. With 10-minute records the scatter of the identified f_1 in my simulations was about ±0.5 %, which is too large compared with the changes to be detected; 30-minute records together with a fitted spectrum reduced it to about 0.1 %. Records are taken at 02:00, when traffic is light and the excitation is closest to broadband, and at 14:00 for the response to traffic.

9.3 Sources of excitation

The ambient excitation comes from wind, ground vibration and above all from traffic. Traffic is not white noise: loaded lorries bounce on their suspensions at about 1.3 to 2.6 Hz and cross at 40 to 60 km/h, and their mass is added to the bridge while they are on it. These effects shift the identified frequencies by up to ±0.2 % depending on how busy the bridge is, which is why a_{RMS} appears in the normalisation of Eq. (11). A drop-weight or shaker test is not needed for routine monitoring but could be used in a special investigation to measure damping or mode shapes more accurately.

9.4 Signal processing

Each record is processed in the sequence a(t) → signal processing → FFT → frequency spectrum → natural frequencies, with two additional steps:

1. **Signal processing:** the mean is removed and the 12 channels are filtered with a fourth-order Butterworth band-pass filter from 0.5 to 30 Hz, applied forwards and backwards so that no phase shift is introduced.
2. **FFT:** Welch averaging with a Hann window of 8192 points (82 s, $\Delta f = 0.012$ Hz) and 50 % overlap, about 43 averages per record.
3. **Frequency spectrum:** auto-spectra of the channels and the full 12 × 12 cross-spectral matrix.
4. **Modal filter:** the channels are combined with the pseudo-inverse of the matrix of baseline mode shapes. This separates the closely spaced first bending and torsion modes, which are only 5 % apart.
5. **Natural frequencies:** a single-degree-of-freedom spectrum (Eq. 14) is fitted to the filtered spectrum around each peak, giving the frequency and damping. The mode shape is the singular vector of the cross-spectral matrix at the peak, compared with the baseline shape by MAC.

$$S(f) = \frac{A}{\left(f_n^2 - f^2\right)^2 + (2\zeta f_n f)^2} + B \tag{14}$$

Damping estimated from ambient data is poor; its scatter in my simulations was about ±25 %. I kept it as a feature only to check whether it was of any use for this bridge, and it was not.

9.5 Accuracy of identification

On simulated records of the healthy bridge with known frequencies, the identified first frequency was within 0.1 to 0.2 % of the true value at night and within 0.3 % in heavy traffic, and the third frequency within 0.3 %. These errors include the effect of traffic and are comparable with the residual scatter after normalisation in Table 10. A change of frequency smaller than about 0.5 % can therefore not be detected from a single record, which is why trends over many records are used in Chapter 14.

10 Deterioration Scenarios

The type, location and size of the deterioration are left open in the problem, so I selected six mechanisms that are realistic for a post-tensioned girder bridge in a wet coastal climate. For each mechanism I identified a cause on this particular bridge, chose a range of values that can be defended, and set up a physical model for its effect on the structure. I kept the ranges wide,

from barely detectable to clearly serious, because the AI/ML models have to learn where detection begins.

10.1 Mechanisms and their ranges

Table 16: Deterioration mechanisms, their models and ranges

Mechanism	Cause on B33	Model in the twin	Range and reason
Loss of prestress (PL)	creep, shrinkage and relaxation larger than predicted; grout voids and strand corrosion near anchorages; anchorage slip	ratio η of actual to expected P_e, in one girder (60 % of cases) or in all girders (40 %); no change of uncracked stiffness; cracking and reopening of cracks as described in Section 10.2	3 to 35 % of P_e. The uncertainty of the predicted long-term loss alone is about ±30 % of 12.7 %, i.e. 4 % of P_e; the upper end covers badly corroded tendons
Concrete deterioration (CD)	poorly compacted or chemically attacked concrete in one girder	reduction d_E of the modulus over a 6 to 15 m zone or the whole girder; strength reduced by $0.9d_E$; voids affecting UPV; faster carbonation	d_E = 5 to 30 %; beyond 30 % the girder would show obvious distress
Flexural cracking (CR)	a vehicle heavier than the design load	loss d_s of flexural stiffness over 4 to 10 m near mid-span in a load test; in ambient vibration only 20 to 50 % of it, since cracks in a prestressed girder close again; residual crack width 0.05 to 0.35 mm	d_s = 15 to 50 % locally, i.e. a few per cent of the stiffness of the girder
Corrosion (CO)	water from a leaking joint or a short drain spout on low-cover concrete of an outer girder; carbonation reaches the links, then strands in poorly grouted ducts	loss c of strand area over 2 to 8 m at a joint end or under a spout; local prestress loss equal to c; stiffness loss 0.25c from spalling; wet concrete, low cover, more negative HCP and lower resistivity; rust and spalling visible only after enough rust has formed	c = 2 to 25 %; 80 % of cases on G1 or G6, which carry the drains
Bearing deterioration (BR)	ageing of the elastomer and debris from a leaking joint packed around the bearing	shear stiffness of the bearing multiplied by 5 to 500 at one or both ends, Eq. (17)	a bearing locked by debris behaves as several hundred times stiffer in shear; 60 % of cases have a visibly leaking joint
Local stiffness loss (LS)	a tall vehicle on the service road striking a fascia girder; internal void or delamination	loss of 15 to 60 % of the flexural stiffness over 1 to 3 m, anywhere between 5 and 28 m	local damage that removes a large part of one section but little of the stiffness of the span; visible in 75 % of cases on outer girders and 40 % on inner girders

The healthy cases also vary: the age of the bridge (5 to 30 years), the depth of carbonation, which grows with the square root of age, the temperature, the moisture of the deck and the

traffic. A campaign contains one mechanism (60 % of campaigns), two mechanisms at the same time (15 %) or none (25 %).

10.2 Physical models of the mechanisms

Loss of prestress. In an uncracked girder with bonded tendons the axial prestressing force does not reduce the flexural stiffness (Hamed and Frostig, 2006), so a loss of prestress does not change the natural frequencies or the response to a load test as long as the girder stays uncracked. It does change the camber and the strain in the concrete. For a loss ΔP, the change of level at mid-span and the change of strain at the soffit are

$$\Delta\delta \approx \frac{\Delta P}{P_e}\,\delta_{P_e}\,(1+\chi\varphi), \qquad \Delta\varepsilon_b \approx \frac{\Delta P}{E_{cm}}\left(\frac{1}{A}+\frac{e}{Z_b}\right)(1+\chi\varphi) \tag{15}$$

where δ_{Pe} = 57 mm is the elastic camber due to P_e (Section 4.8), and $(1 + \chi\varphi) = 1.8$ allows for creep under a slowly developing loss. This gives about 1.0 mm of sag and 12 με of tensile strain change per 1 % loss of prestress. The girder cracks when the soffit stress under heavy (not extreme) traffic, taken as 0.8 times the design live load together with 0.6 times the reverse temperature difference, exceeds f_{ctm}. Once cracked, a section reopens in a later load test as soon as the soffit is decompressed again, and its stiffness above the decompression moment M_{dec} follows a Branson-type expression,

$$I_{\text{eff}} = \left(\frac{M_{dec}}{M_a}\right)^3 I_g + \left[1-\left(\frac{M_{dec}}{M_a}\right)^3\right] I_{cr}, \qquad \frac{I_{cr}}{I_g} = 0.35 \tag{16}$$

Bearing deterioration. In a two-dimensional grillage a horizontal restraint at the level of the bearings cannot be modelled directly. If both ends of a girder are restrained horizontally at a distance e below the neutral axis, a rotation of the ends stretches the soffit and the restraint produces end moments. This was modelled as a rotational spring that couples the two end rotations of each girder,

$$k_r = k_s\, e^2, \qquad k_s = \left(\frac{1}{k_{b,A}}+\frac{1}{k_{sub,A}}+\frac{L}{EA}+\frac{1}{k_{b,B}}+\frac{1}{k_{sub,B}}\right)^{-1} \tag{17}$$

where k_b is the shear stiffness of a bearing and k_{sub} the horizontal stiffness of the pier or abutment. The same series stiffness gives the movement of each bearing per degree of temperature. One consequence is important for monitoring: if only one end is restrained, k_s remains small (the other end is still free), the frequencies hardly change, but the free end takes the whole movement, which the bearing transducers see immediately.

Concrete deterioration reduces the modulus in a zone of one girder. In the NDT model the pulse velocity changes with the square root of the dynamic modulus ($V \propto \sqrt{E_d}$), so a 20 % loss of modulus lowers the UPV by about 10 %, while the rebound number follows the reduced strength of the surface concrete. **Corrosion** combines a local loss of strand area, a local loss of

prestress and some spalling with the NDT signature described in Table 14. **Cracking** and **local stiffness loss** reduce the flexural stiffness of a few elements of one girder.

10.3 Effect on the measured quantities

Before any random data were generated, each mechanism was increased from zero to the upper end of its range on girder G1 (or on all girders where that is the natural case), with all noise switched off. Figure 15 shows what each measurement can and cannot see before any machine learning is involved.

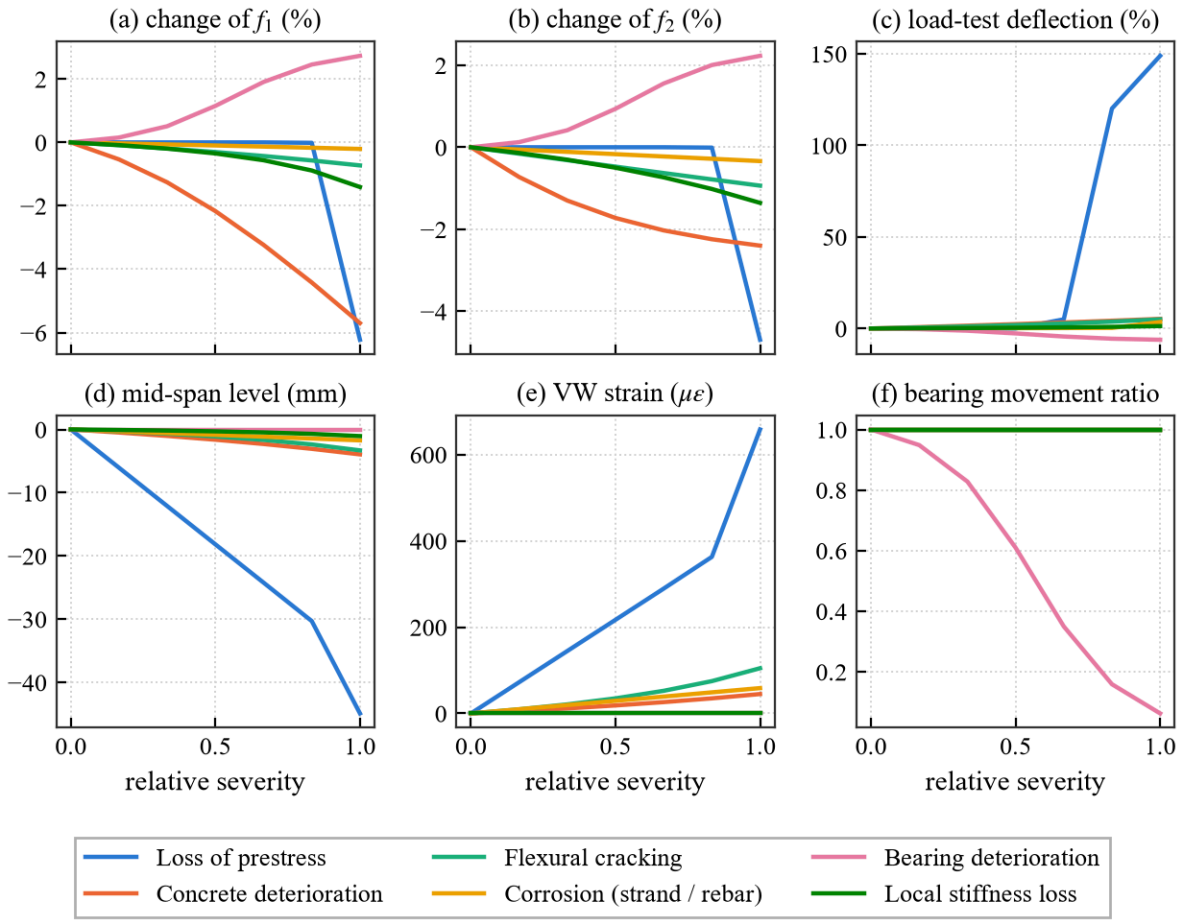


Figure 15: Response of the twin (without noise) to each mechanism, from healthy (0) to the upper end of its range (1)

- **Loss of prestress** leaves the frequencies and the load-test deflection unchanged until the girders crack, at roughly 25 % loss; after that the load-test deflection increases sharply (by 149 % at 35 % loss). The level change (-18.2 mm at about 18 % loss) and the VW strain (217 με) respond from the start.
- **Bearing restraint** *increases* the frequencies, by up to 2.7 % for f_1 when both ends are locked, because a horizontal force below the neutral axis resists the rotation of the ends. A rise in frequency therefore does not mean that the bridge is healthy.

- **Concrete deterioration** over a whole girder lowers f_1 by up to 5.7 % and increases the load-test deflection by 5 %; a mechanism that changes the stiffness of a large volume is the one that global vibration detects best.
- **Cracking, corrosion and local stiffness loss** change the global quantities by a fraction of a per cent to a few per cent. They are local, and the six-girder deck redistributes the load around them.

These changes have to be compared with the effect of temperature: a day 10 °C warmer lowers f_1 by about 1.5 %, which is as much as a 20 % loss of modulus in one girder. As the problem statement also warns, a change in frequency cannot be read directly as a particular type of damage. Figure 15 shows the reason: four mechanisms lower the frequency, one raises it, one leaves it unchanged, and temperature can move it either way.

11 Synthetic Data

11.1 Generation of a measurement campaign

I produced the synthetic data with the updated twin of Chapter 5 and not with the hidden 'real' model, because in practice only the model of the bridge is available for simulation. Every synthetic campaign goes through the same steps as a real measurement campaign (Table 17).

Table 17: Steps in the generation of one synthetic campaign

Step	What is generated	Variability and noise
Scenario	0, 1 or 2 mechanisms of random size and location (Chapter 10)	25 % healthy, 60 % one mechanism, 15 % two mechanisms
Environment	effective bridge temperature from a seasonal and daily model of the site; deck moisture in the monsoon	16 to 41 °C; mass +0.6 % in the monsoon, ±0.2 % at random
Vibration	response of 8 modes to moving lorries (bounce 1.3 to 2.6 Hz, amplitude 2 to 6 %), cars and broadband ambient forces; 12 channels, 30 minutes, 100 Hz	3 to 60 vehicles per 10 minutes at night, 150 to 420 by day; damping 1.5 ± 0.2 %; sensor noise 2 µg/√Hz
Identification	complete processing of Chapter 9 applied to each record	frequencies, MAC, damping, a_{RMS} and a_{max} as identified, not as simulated
Load test	four 300 kN lorries; deflection and strain of all six girders	lorry weight ±1 %; 0.05 mm; 3 µε
Geometry and VW strain	change beyond the healthy creep prediction	creep model error 2.5 mm and 25 µε (common to all girders); instrument error 0.8 mm and 3 µε
Bearings	movement per °C at both ends	±0.012 mm/°C
NDT	30 test areas of span S2: rebound, UPV, cover, HCP, resistivity, carbonation, chloride	scatter of strength, cover and carbonation rate in the structure; reading errors of each test

Step	What is generated	Variability and noise
Visual inspection	observations with size and condition state	hairline cracks often missed (probability of detection $1 - e^{-w/0.06}$); condition state wrong by one for 15 % of entries; early defects often not visible

In total 3600 campaigns were generated: 902 healthy, about 362 for each single mechanism and 521 with two mechanisms. Each campaign contains 52 raw quantities and its true labels, and the data are stored in `out/data/library.csv`. Some examples are given below.

11.2 Examples of the synthetic data

Table 18: Synthetic load-test, geometry and frequency data for increasing loss of prestress (without noise, 25 °C)

Condition (all girders)	Deflection G1 (mm)	Deflection G3 (mm)	Strain G1 (µε)	Level change (mm)	VW change (µε)	f_1 (Hz)
Healthy	4.38	6.31	60	+0.0	+0	3.741
Prestress loss 20 %	4.38	6.31	60	-20.8	+248	3.741
Prestress loss 27 %	9.29	11.44	183	-28.0	+335	3.741
Prestress loss 33 %	12.05	14.18	194	-38.1	+529	3.634

Table 18 shows the result of Chapter 10 in numbers: up to 20 % loss the load test and the frequency show nothing, whereas the level and the VW strain have already changed by about 21 mm and 250 µε. Once the girders crack (27 %) the load-test deflection increases sharply.

Table 19: Synthetic NDT data along girder G1 of span S2 at an age of 18 years

Location	Rebound number	UPV (km/s)	Cover (mm)	Carbonation (mm)	HCP (mV)	Resistivity (kΩcm)	Cluster (Ch. 14)
S2-G1-Z1	45	4.50	51	16	-241	18	wet / corrosion risk
S2-G1-Z2	43	4.52	53	12	-135	42	sound / dry
S2-G1-Z3	40	4.57	61	11	-149	37	sound / dry
S2-G1-Z4	40	4.41	31	14	-456	12	wet / corrosion risk
S2-G1-Z5	42	4.38	40	12	-436	11	wet / corrosion risk

Along G1 the readings change towards the joint end (Z4 and Z5): the resistivity drops and the potentials become more negative where the concrete is wet, and the cover is lower than specified with the carbonation front close to it. UPV and rebound are hardly affected, because the concrete itself is sound; corrosion is a problem of the steel and its environment, not of the quality of the concrete.

Table 20: Synthetic vibration data for two deterioration cases and a change of temperature

Mode	Healthy (Hz)	Concrete deterioration, G1, −20 % E (Hz)	Bearings restrained at both ends, ×100 (Hz)	Temperature +10 °C (Hz)
f_1, bending	3.741	3.620 (-3.2 %)	3.823 (+2.2 %)	3.685 (-1.5 %)
f_2, torsion	3.932	3.852 (-2.0 %)	4.002 (+1.8 %)	3.873 (-1.5 %)
f_3, transverse	8.815	8.770 (-0.5 %)	8.852 (+0.4 %)	8.684 (-1.5 %)

The example in the problem statement changes f_1 from 3.20 to 3.05 Hz, i.e. by −4.7 %. Since the frequency varies with √EI, a change of that size on B33 would need a loss of about 9 % of the bending stiffness of the whole deck, more than any single mechanism in the chosen ranges produces, or simply a temperature rise of about 30 °C. The frequency alone cannot tell these apart. The pattern across the modes carries more information: deterioration of G1 lowers f_1 more than f_2 and f_3, bearing restraint raises f_1 and f_2 but hardly f_3, and temperature changes all three by nearly the same percentage. For this reason all four tracked modes are kept as features.

12 Feature Extraction

A useful feature should have a physical meaning, respond to at least one mechanism and be stable on the healthy bridge. Each feature used here is expressed as a change from the structure's *own* healthy baseline: the residual of a frequency after the temperature and traffic model of Eq. (11), the load-test deflection relative to the commissioning test after correction to 25 °C, the levels and VW strains relative to the creep prediction, and the bearing movement relative to αL/2. This is essential because the models are trained on twin data and then applied to the real bridge; an error of 0.5 % in the twin's absolute frequency would otherwise look like damage.

Table 21: The 33 features used by the AI/ML models

Group	Features	Physical meaning
Vibration	change of f1 (%), change of f2 (%), change of f3 (%), change of f4 (%), MAC mode 1, MAC mode 2, mode-1 edge asymmetry, damping mode 1	global stiffness, mass and boundary conditions; MAC and edge asymmetry show which side of the deck has changed

Group	Features	Physical meaning
Load test	load-test deflection change (%), deflection asymmetry G1-G6 (%), largest girder deflection change (%), soffit strain change (%), largest girder strain change (%)	static stiffness of each girder under a known load; the asymmetry locates a soft girder
Geometry, VW strain	mid-span level change (mm), largest sag of a girder (mm), level asymmetry G1-G6 (mm), VW strain change (με), largest VW strain change (με)	permanent deformation: loss of precompression (camber, soffit strain) and creep of a softened girder
Bearings	bearing movement ratio, bearing movement A - B (mm/°C)	freedom of the bearings; restraint at one end doubles the movement at the other
NDT	lowest UPV (km/s), lowest rebound number, most negative HCP (mV), lowest resistivity (kΩcm), lowest cover (mm), carbonation depth - cover (mm)	condition of the concrete (UPV, rebound) and of the steel (HCP, resistivity, cover against carbonation)
Visual inspection	flexural crack width (mm), crack along bars/ducts (mm), spalled area (m²), rust-stain locations, girder condition state, bearing condition state, joint leaking	what the inspector sees: cracks, spalling, rust, bearing and joint distress

I started from the feature vector suggested in the problem statement, $x = [f_1, f_2, a_{RMS}, \delta_{max}, \varepsilon_{max}$, UPV, rebound number], and changed two of its entries after looking at the data. a_{RMS} and a_{max} depend much more on traffic than on condition (the ratio between day and night is about 2), so they are used to *normalise* the frequencies rather than as condition features. δ_{max} was replaced by the change of the mean deflection together with the G1–G6 asymmetry, which separate a global from a local change. Figure 16 shows, before any classifier is trained, how strongly each feature reacts to each mechanism, measured as the shift of its mean in units of the healthy standard deviation.

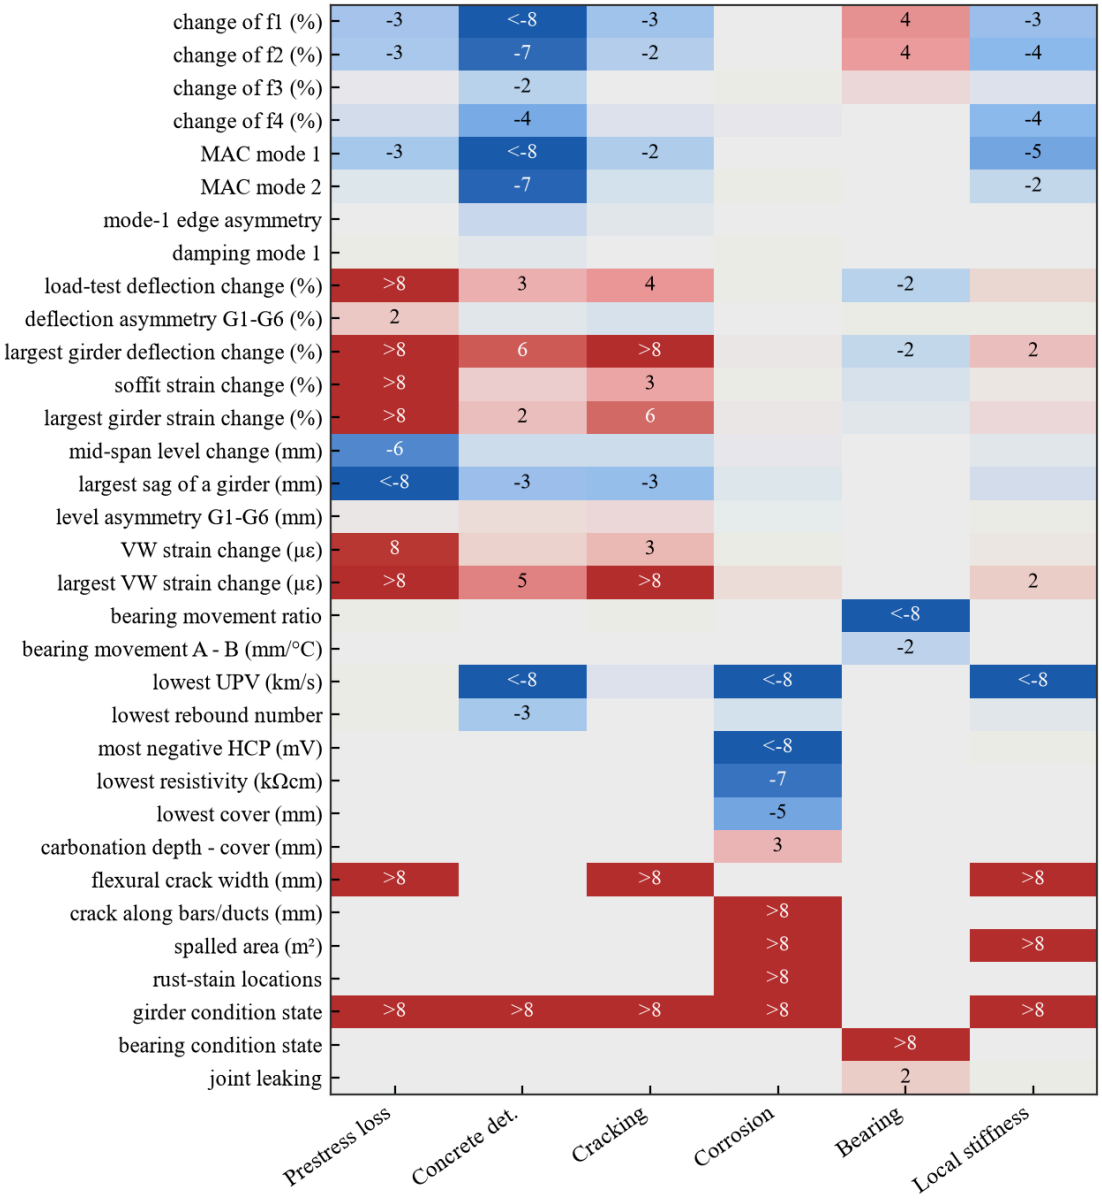


Figure 16: Effect of each mechanism on each feature: shift of the mean from the healthy mean, in healthy standard deviations (campaigns in the upper half of each severity range). Blue: decrease, red: increase.

Reading Figure 16 column by column already gives most of the rules an engineer would write: loss of prestress moves the levels and the VW strain; bearing restraint changes the bearing movement ratio, raises f_1 and often comes with a leaking joint; corrosion changes the potentials, the resistivity and the cover relative to carbonation; concrete deterioration lowers UPV and rebound and, over a whole girder, the frequencies; cracking and local damage appear in the load test and the inspection. The machine-learning models are useful because they combine these weak and overlapping signals consistently, attach a measure of confidence and estimate the size of the problem. Figure 17 shows the distributions of six of the features.

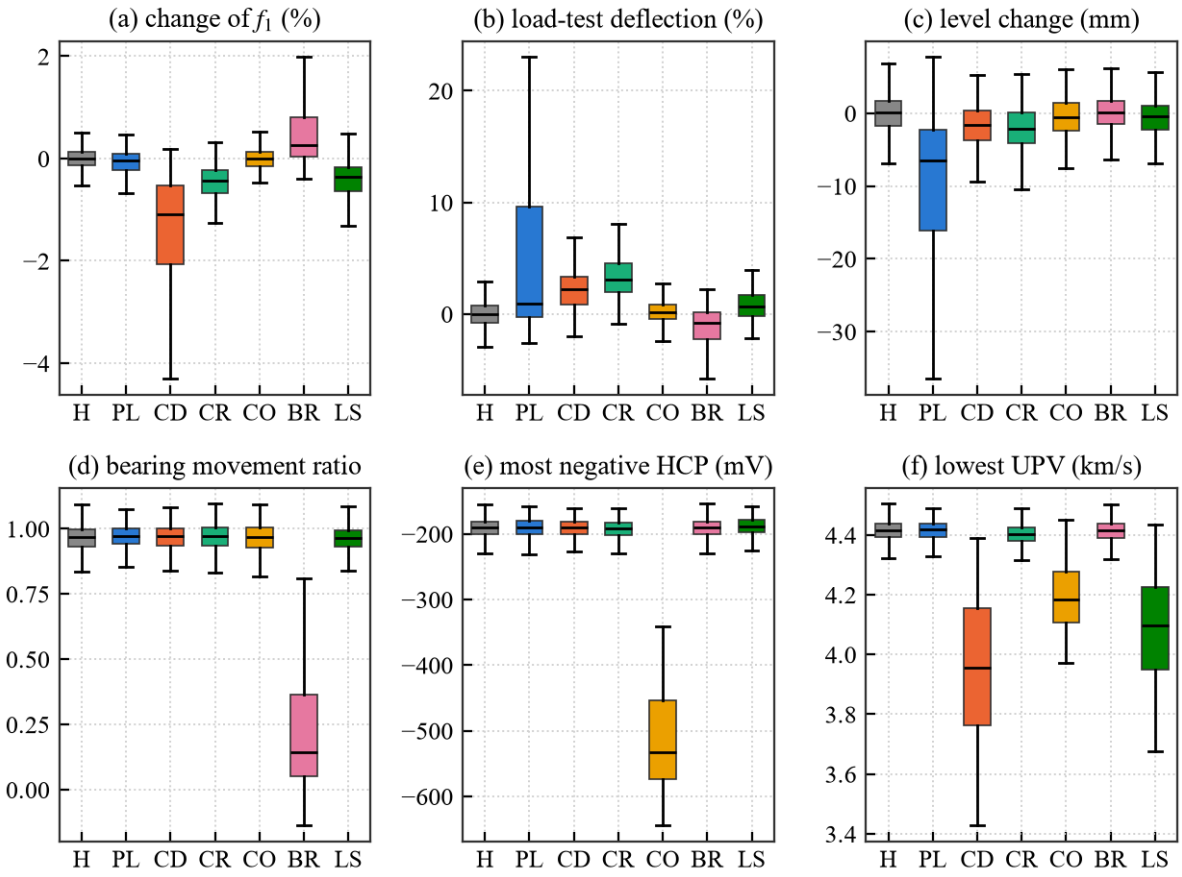


Figure 17: Distributions of six features for healthy (H) and single-mechanism campaigns (boxes: quartiles; whiskers: 1.5 times the interquartile range)

13 AI/ML-Assisted Condition Assessment

The library was split into a training set (2509 campaigns) and a test set (1091 campaigns), stratified by class; all results below are for the test set. Each method is introduced together with the question it answers.

13.1 Is the bridge different from its healthy self? (novelty detection)

The novelty detector is trained on healthy campaigns only. This matches the situation on a real bridge, which has a healthy baseline but no labelled examples of its own damage. For a standardised feature vector x the squared Mahalanobis distance from the healthy data is

$$D^2(\mathbf{x}) = (\mathbf{x} - \boldsymbol{\mu}_H)^{\mathrm{T}} \, \boldsymbol{\Sigma}_H^{-1} \, (\mathbf{x} - \boldsymbol{\mu}_H) \tag{18}$$

where μ_H and Σ_H are the mean and the covariance of the healthy training campaigns. The covariance was shrunk slightly towards its diagonal, and a small value was added to the diagonal so that features which are always zero on a healthy bridge (rust stains, for example) do not make the matrix singular. A campaign is flagged when D^2 exceeds the 99th percentile of the healthy training values, i.e. the designed false-alarm rate is 1 %.

Table 22: Share of test campaigns flagged by the novelty detector

Data source	Healthy (false alarm)	Loss of prestress	Concrete deterioration	Flexural cracking	Corrosion	Bearing deterioration	Local stiffness loss
Vibration only	1 %	12 %	87 %	45 %	2 %	40 %	60 %
Static + geometry + bearings	1 %	85 %	73 %	89 %	14 %	100 %	29 %
Inspection + NDT	2 %	33 %	92 %	95 %	100 %	85 %	98 %
Continuous monitoring (no lane closure)	2 %	79 %	89 %	76 %	12 %	100 %	60 %
All sources fused	3 %	86 %	96 %	100 %	100 %	100 %	98 %

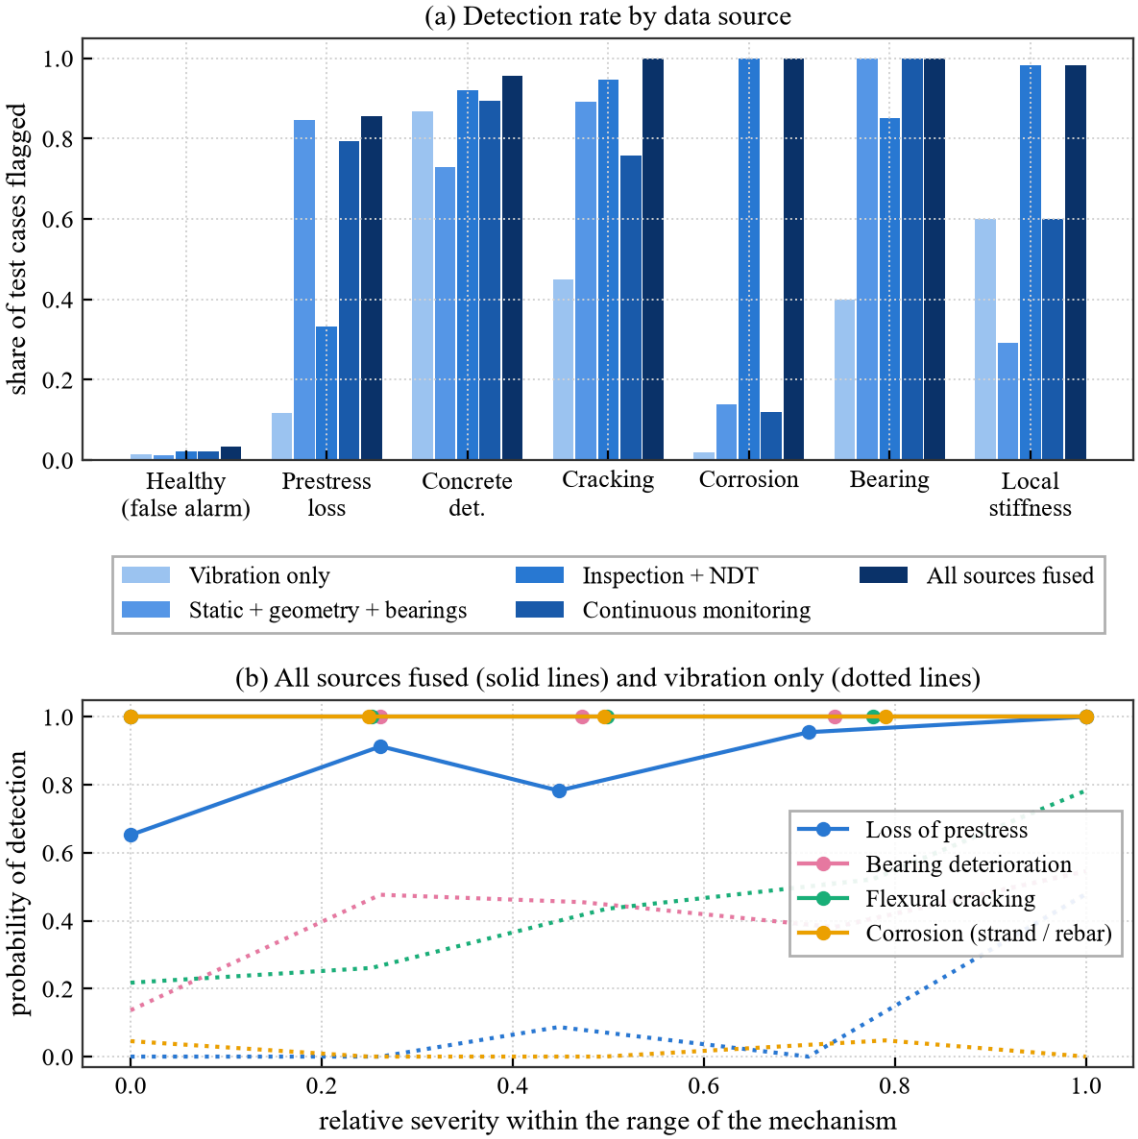


Figure 18: Novelty detection: detection rate by data source, and probability of detection against severity

With vibration data alone the detector finds most cases of concrete deterioration (87 %) and local stiffness loss (60 %), fewer bearing cases (40 %, essentially those restrained at both ends), and almost no cases of prestress loss (12 %) or corrosion (2 %). This confirms Figure 15 in the presence of noise and environmental variation: vibration monitoring alone is not suitable for the two mechanisms that most often govern the life of a post-tensioned bridge. Adding levelling, VW strain and bearing movement, which can all be measured without closing the bridge, raises the detection of prestress loss to 79 % and of bearing problems to 100 %. With all sources combined, every mechanism is detected in 86 % or more of the cases at a false-alarm rate of 3 %; the cases that are missed are the smallest ones.

13.2 Which mechanism? (supervised classification and data fusion)

For each mechanism a random forest (Breiman, 2001) of 100 classification trees was trained to answer the question 'is this mechanism present?', so that two mechanisms can be reported at the

same time. Each tree is grown on a bootstrap sample of the training data; at each node it tries √p randomly chosen features and selects the split that reduces the Gini impurity the most,

$$G = 1 - \sum_k p_k^2 \tag{19}$$

where p_k is the share of class k in the node. The probability given by the forest is the average over its trees. The same model was trained on each data source separately and on all of them together; this is the data-fusion study. The models are compared with the area under the ROC curve (AUC) and with the F1 score at a threshold of 0.5,

$$F_1 = \frac{2\,\text{Precision} \cdot \text{Recall}}{\text{Precision} + \text{Recall}} \tag{20}$$

Table 23: ROC-AUC / F1 for each mechanism and data source (test set)

Data source	Loss of prestress	Concrete deterioration	Flexural cracking	Corrosion	Bearing deterioration	Local stiffness loss	Macro-F1
Vibration only	0.57 / 0.04	0.92 / 0.66	0.85 / 0.31	0.57 / 0.00	0.83 / 0.54	0.81 / 0.39	**0.32**
Static + geometry + bearings	0.91 / 0.78	0.82 / 0.46	0.92 / 0.64	0.64 / 0.00	1.00 / 1.00	0.67 / 0.07	**0.49**
Inspection + NDT	0.73 / 0.29	0.97 / 0.84	0.97 / 0.87	1.00 / 1.00	0.97 / 0.93	0.99 / 0.86	**0.80**
Continuous monitoring (no lane closure)	0.88 / 0.74	0.92 / 0.68	0.88 / 0.47	0.64 / 0.00	1.00 / 1.00	0.83 / 0.40	**0.55**
All sources fused	0.93 / 0.79	0.98 / 0.84	1.00 / 0.94	1.00 / 1.00	1.00 / 1.00	0.99 / 0.81	**0.90**

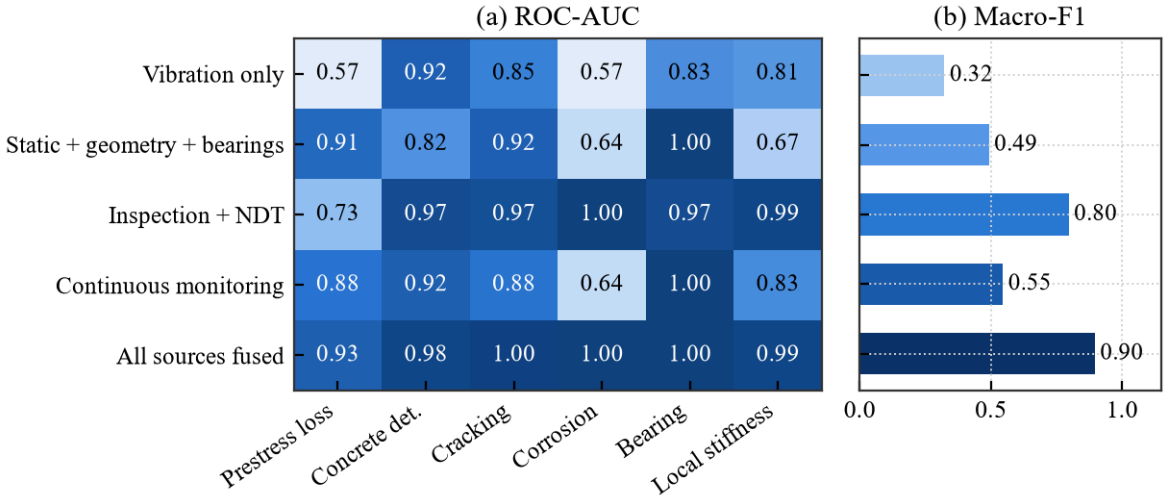


Figure 19: ROC-AUC for each mechanism and data source, and macro-averaged F1 score

The macro-F1 increases from 0.32 with vibration alone to 0.49 with static, geometric and bearing data, 0.80 with inspection and NDT, and 0.90 with all sources combined. No single source is sufficient, and the sources complement each other in a way that follows the physics: NDT and inspection see corrosion and surface damage, levelling and VW strain see the prestress, the bearing transducers see the bearings, and the load test sees cracking. A logistic regression on the combined features reaches AUC values of 0.88 to 1.00, close to those of the random forest, so the choice of features mattered far more than the choice of algorithm.

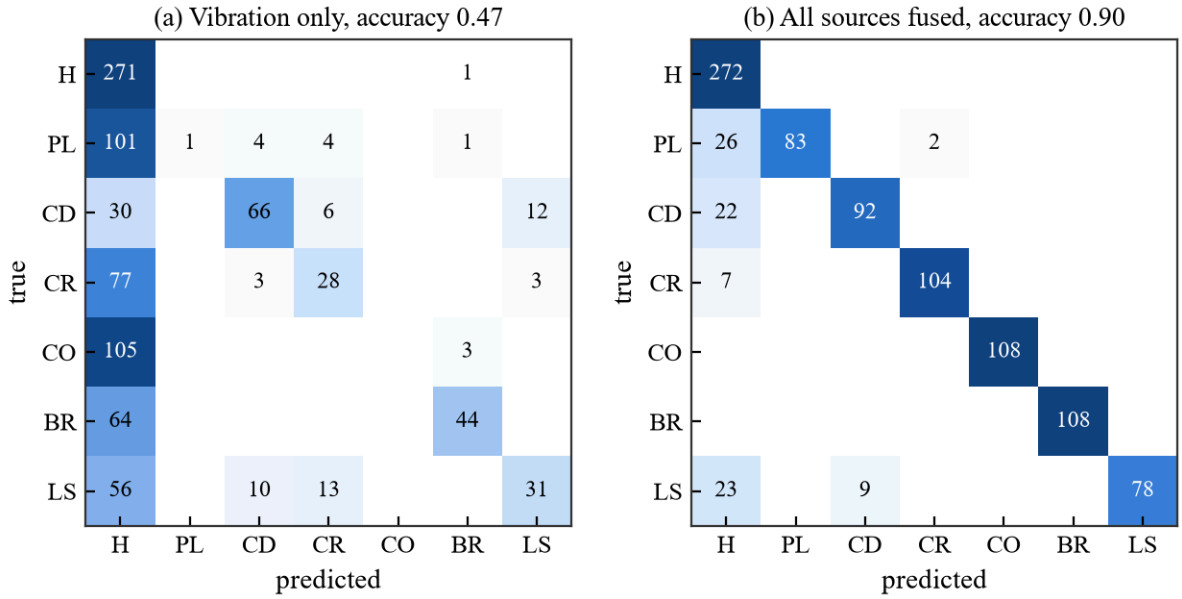


Figure 20: Most likely mechanism for healthy and single-mechanism test campaigns: vibration data only and all sources combined

The confusion matrices of Figure 20 show where the errors are. With vibration alone, prestress loss and corrosion are mostly classified as healthy, and cracking, local stiffness loss and concrete deterioration are confused with each other because all three lower the frequencies slightly and differ mainly in where and by how much. With all sources, the remaining errors are early prestress loss and the smallest cases of cracking and concrete deterioration, which are hard to see by any means.

13.3 How much prestress has been lost? (regression with uncertainty)

The size of a loss of prestress decides between continued monitoring and strengthening, so an estimate without its uncertainty is of little use. Gaussian-process regression (Rasmussen and Williams, 2006) gives both. With a squared-exponential covariance function with one length scale per input, the prediction at a new point $\mathbf{x}_*$ has the mean and variance

$$\mu_* = \mathbf{k}_*^{\mathrm{T}} \left(\mathbf{K} + \sigma_n^2 \mathbf{I}\right)^{-1} \mathbf{y}, \qquad \sigma_*^2 = k_{**} - \mathbf{k}_*^{\mathrm{T}} \left(\mathbf{K} + \sigma_n^2 \mathbf{I}\right)^{-1} \mathbf{k}_* \tag{21}$$

where $\mathbf{K}$ is the covariance matrix of the training inputs, $\mathbf{k}_*$ the covariances between the new point and the training points, and σ_n the noise. The hyper-parameters were found by maximising

the marginal likelihood. The inputs are the largest sag of a girder, the mean level change, the largest and mean VW strain changes, the change of load-test deflection and the width of flexural cracks. On the test set the mean absolute error is **2.6 %** of P_e ($R^2 = 0.83$) and the 95 % band contains the true value in 92 % of the cases, so the stated uncertainty is realistic (Figure 21). A random forest gives a similar error (2.7 %). A purely physical inversion with the sensitivities of Eq. (15) on the worst instrumented girder is less accurate (MAE 6.4 %), mainly because it cannot see losses in G2 and G5, which have no gauges, and because it is disturbed by a second mechanism in the two-mechanism cases. The shortest length scales of the fitted process belong to the load-test deflection change (%) and the largest VW strain change (με).

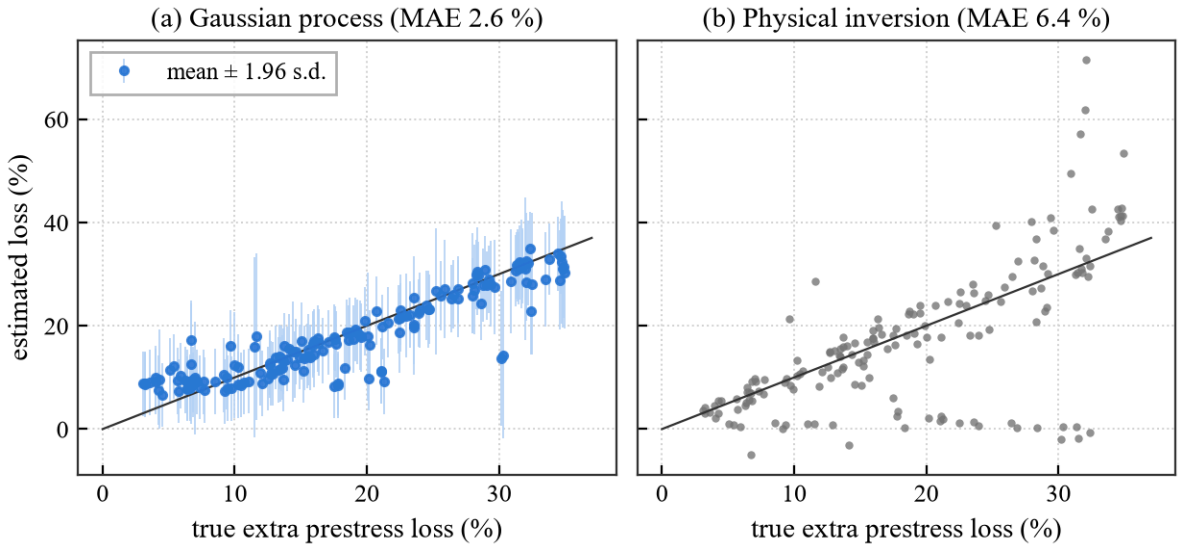


Figure 21: Estimated against true extra loss of prestress for the test campaigns: Gaussian-process regression and physical inversion

13.4 Where? (localisation)

A random forest using the deflections and strains of each girder in the load test, the levels, the VW strains and the asymmetry of the first mode shape identifies the affected girder in **70 %** of the single-mechanism test cases (prestress loss 75 %, concrete deterioration 78 %, cracking 87 %, corrosion 45 %, local stiffness loss 64 %). Corrosion is located worst because its effect on the global response is small and often near a support, where the load test is not sensitive; for corrosion the location comes from the NDT grid instead (Chapter 14).

13.5 Do the models use the physics?

The importance of a feature was measured by permutation: the values of the feature in the test set were shuffled and the resulting drop in AUC was recorded. The importances (Figure 22) agree with the effect sizes of Figure 16 and with the mechanisms of Chapter 10. The model for prestress loss relies on the VW strain and the levels, the bearing model on the bearing movement ratio, the corrosion model on the resistivity and the potentials, and the model for concrete deterioration on the UPV. I treated this agreement as a necessary condition for trusting

the models: a model that detected corrosion from the damping of the first mode, for example, would have learnt a peculiarity of the simulation rather than anything about the bridge.

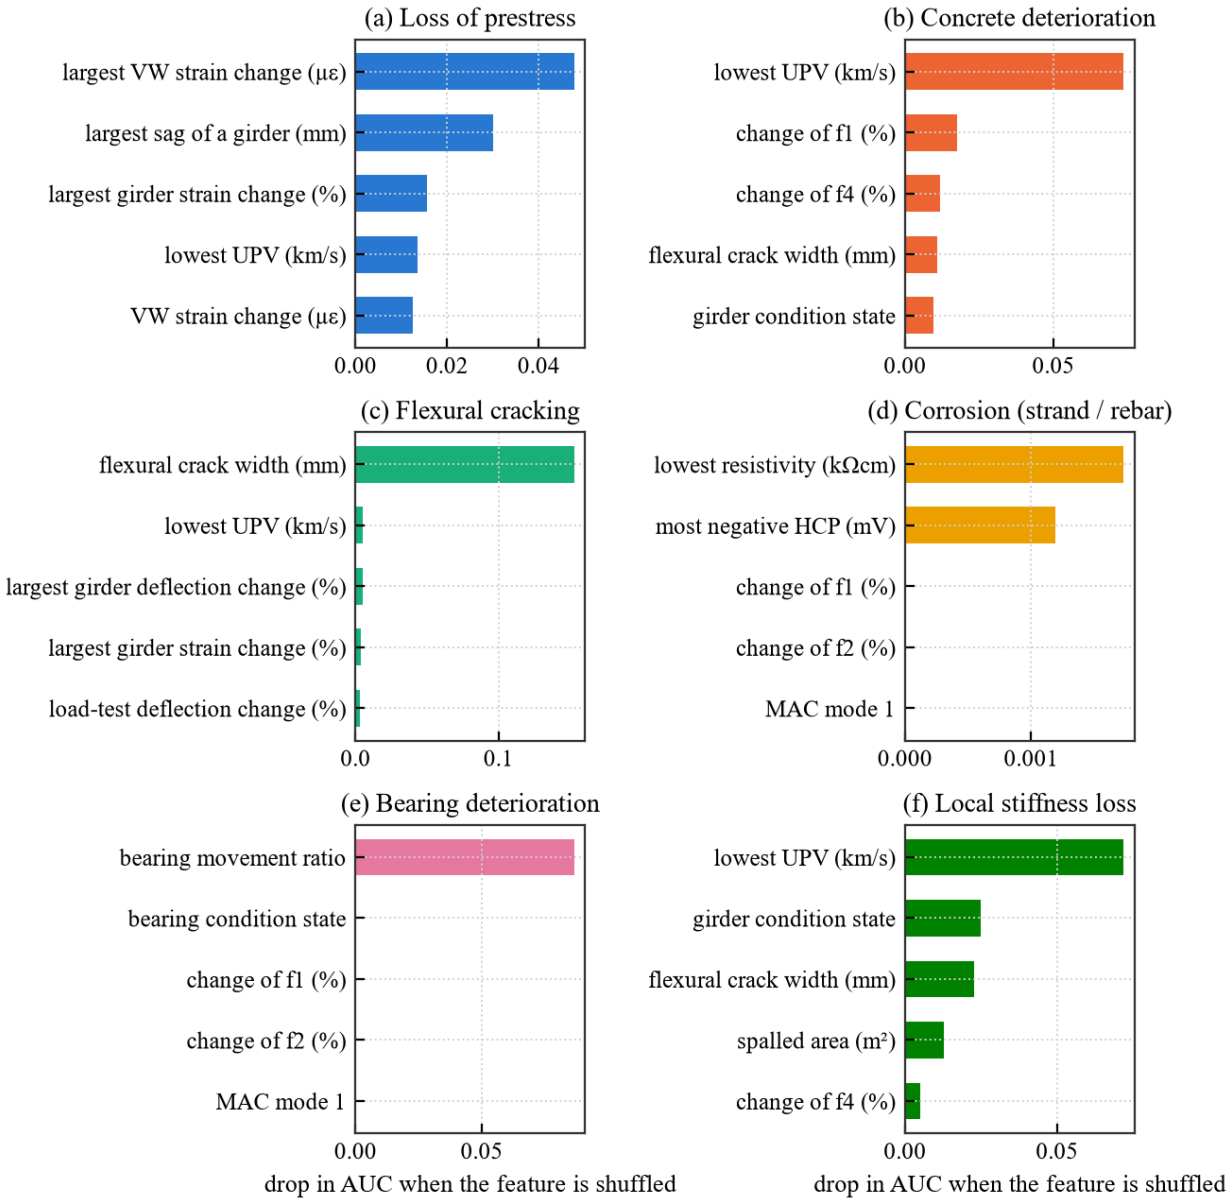


Figure 22: Permutation importance of the five most important features for each mechanism (all sources combined)

13.6 Limitations

- All data are synthetic. The scores show how well the method works *if the twin and the noise models are right*. On a real bridge they would be lower, and the models would have to be recalibrated with the bridge's own data.
- The twin is a linear grillage. Loss of bond, behaviour of crack faces, friction in the bearings and soil-structure interaction are represented only by simple rules.
- The labels in the library are exact. In practice the condition at the time of a past campaign is often unknown, which is why novelty detection against the healthy baseline, and not the

supervised models, is the first step of the assessment.

- Only six mechanisms were considered. A different mechanism, such as fatigue of a strand or scour of a pier, would appear as 'novel but not classified', which is the appropriate result for a case the models were not trained on.

14 Assessment of B33 at an Age of 18 Years

This chapter applies everything above to the bridge itself. The 'real' bridge (the hidden model of Chapter 5) was aged for 18 years with a deterioration history that was not used by the assessment. Monthly monitoring records (night-time vibration, bearing movement, VW strain) and yearly levels were generated for the whole period, and in year 18 a principal inspection with NDT of all spans and a load test were carried out. The assessment uses only these measurements, the baseline of Chapter 5 and the models of Chapter 13.

14.1 Monitoring record

Each monitored quantity x_t was followed with an exponentially weighted moving average,

$$z_t = \lambda\, x_t + (1-\lambda)\, z_{t-1}, \qquad \text{limits}: \quad \mu_0 \pm L\,\sigma_0 \sqrt{\frac{\lambda}{2-\lambda}} \tag{22}$$

with $\lambda = 0.2$ and $L = 3$, where μ_0 and σ_0 are the mean and standard deviation of the first two years. The long-term slope over the last three years was estimated with the Theil–Sen estimator (the median of all pairwise slopes), which is not affected by a few outliers.

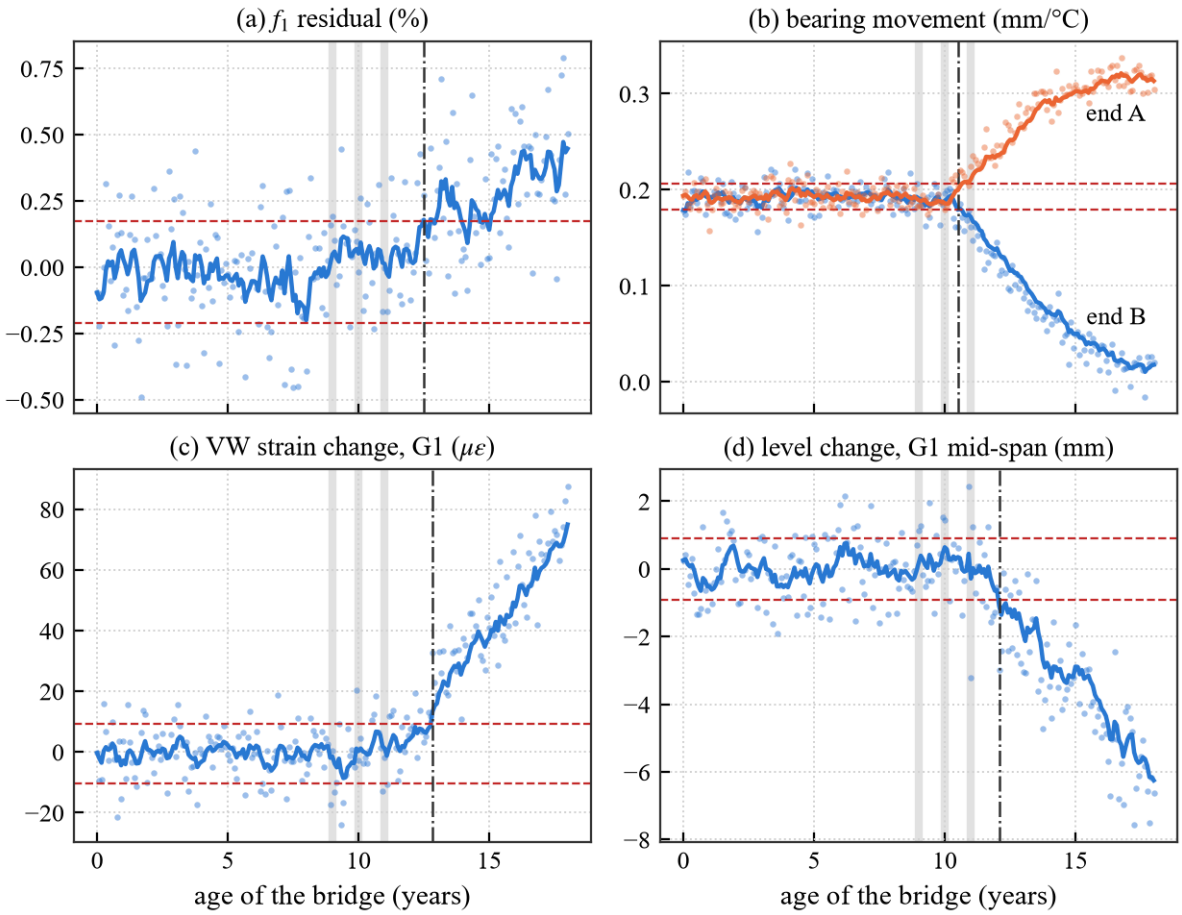


Figure 23: Eighteen years of monitoring of span S2: monthly values and EWMA with ±3σ limits from the first two years. The grey bands mark the hidden onset of the changes and the dash-dot lines the first alarm.

Table 24: Trend identification on the monitoring record

Monitored quantity	First EWMA alarm (year)	Theil–Sen slope over the last 3 years (per year)
f1 residual	12.5	+0.030
f2 residual	13.2	+0.039
bearing B movement	10.5	-0.009
bearing A movement	10.6	+0.004
VW strain G1	12.8	+12.575
level G1	12.1	-1.143

The bearing transducers gave the first and clearest signal, in year 10.5: the movement at end B fell towards zero while that at end A increased, which is the signature of a bearing being locked at one end while the other end takes over the movement. The f_1 residual also raised an alarm, in year 12.5, but *upwards*: the span had become stiffer. On its own this could be mistaken for a sign of good health or for an error in the temperature model; next to the bearing record it is the restraint described in Chapter 10. The level of G1 dropped (alarm in year 12.1) and its VW gauge drifted towards tension (year 12.8), which is the pattern of lost precompression in one

girder. All alarms came one to two years after the hidden onsets, which is about what EWMA charts with these limits can achieve with monthly data. With vibration data alone the record would only have said that the bridge had become stiffer.

14.2 Principal inspection and NDT at year 18

Table 25: Main observations of the year-18 inspection (condition state 3 and worse)

Span	Component	Location	Observation	Size	CS	Note
S2	G1	Z4	Cracking	0.39 mm	5	longitudinal, along bars / duct, rust in crack
S2	G1	Z5	Cracking	0.45 mm	5	longitudinal, along bars / duct, rust in crack
S2	BRG	G3-B	Bearing distress		5	hardened / restrained, debris around bearing
S2	BRG	G2-B	Bearing distress		4	hardened / restrained, debris around bearing
S2	BRG	G4-B	Bearing distress		4	hardened / restrained, debris around bearing
S2	BRG	G5-B	Bearing distress		4	hardened / restrained, debris around bearing
S2	BRG	G6-B	Bearing distress		4	hardened / restrained, debris around bearing
S2	EJ	EJ-P2	Leakage		4	water and silt onto pier cap
S2	G1	Z4	Spalling	0.18 m2	3	
S2	G1	Z4	Leakage	damp patches / efflorescence	3	
S2	G1	Z5	Corrosion staining		3	
S2	G1	Z5	Leakage	damp patches / efflorescence	3	
S3	G1	Z1	Leakage	damp patches / efflorescence	3	
S2	EJ	EJ-P1	Joint distress		3	seal torn, debris packed in gap

The bridge condition index is **38** out of 100. The worst component groups are the girders (CS5), bearings (CS5), expansion joints (CS4), drainage (CS3). All serious findings lie within a few metres of the expansion joint over pier P2: the torn seal, silt around the S2 bearings at end B and the S3 bearings at end A, leakage and spalling on the pier cap, a short drain spout, and rust-stained splitting cracks and spalling at the anchorage end of G1. The inspector rated two of these cracks, 0.39 and 0.45 mm wide along the duct line in zones Z4 and Z5, as CS5, although by the width rule they would be CS4. The rating was kept in the record, because rust coming

out of a crack along a tendon duct next to an anchorage is exactly the warning sign that preceded the collapse of the Ynys-y-Gwas bridge (Woodward and Williams, 1988), but the category of the bridge was decided only after the structural check of Section 14.4.

The 90 NDT test areas of the three spans were grouped with a Gaussian mixture model fitted by the EM algorithm to the standardised UPV, rebound number, half-cell potential, logarithm of resistivity and cover minus carbonation depth. The Bayesian information criterion (BIC) was lowest for 2 components, so two groups were kept: 83 areas of sound, dry concrete and 7 areas of wet concrete with a risk of corrosion (Figure 24). All 7 of the latter lie at girder ends next to the joints over the two piers (S1-G1-Z5, S1-G6-Z5, S2-G1-Z1, S2-G1-Z4, S2-G1-Z5, S2-G6-Z1, S3-G1-Z1). Within this group the ASTM C876 limits separate the areas further: only S2-G1-Z4 and S2-G1-Z5 have potentials below −350 mV together with a resistivity near 10 kΩcm, i.e. probable active corrosion, while the others are wet but still passive. k-means clustering with the same number of groups agrees with the mixture model for 98 % of the pairs of test areas.

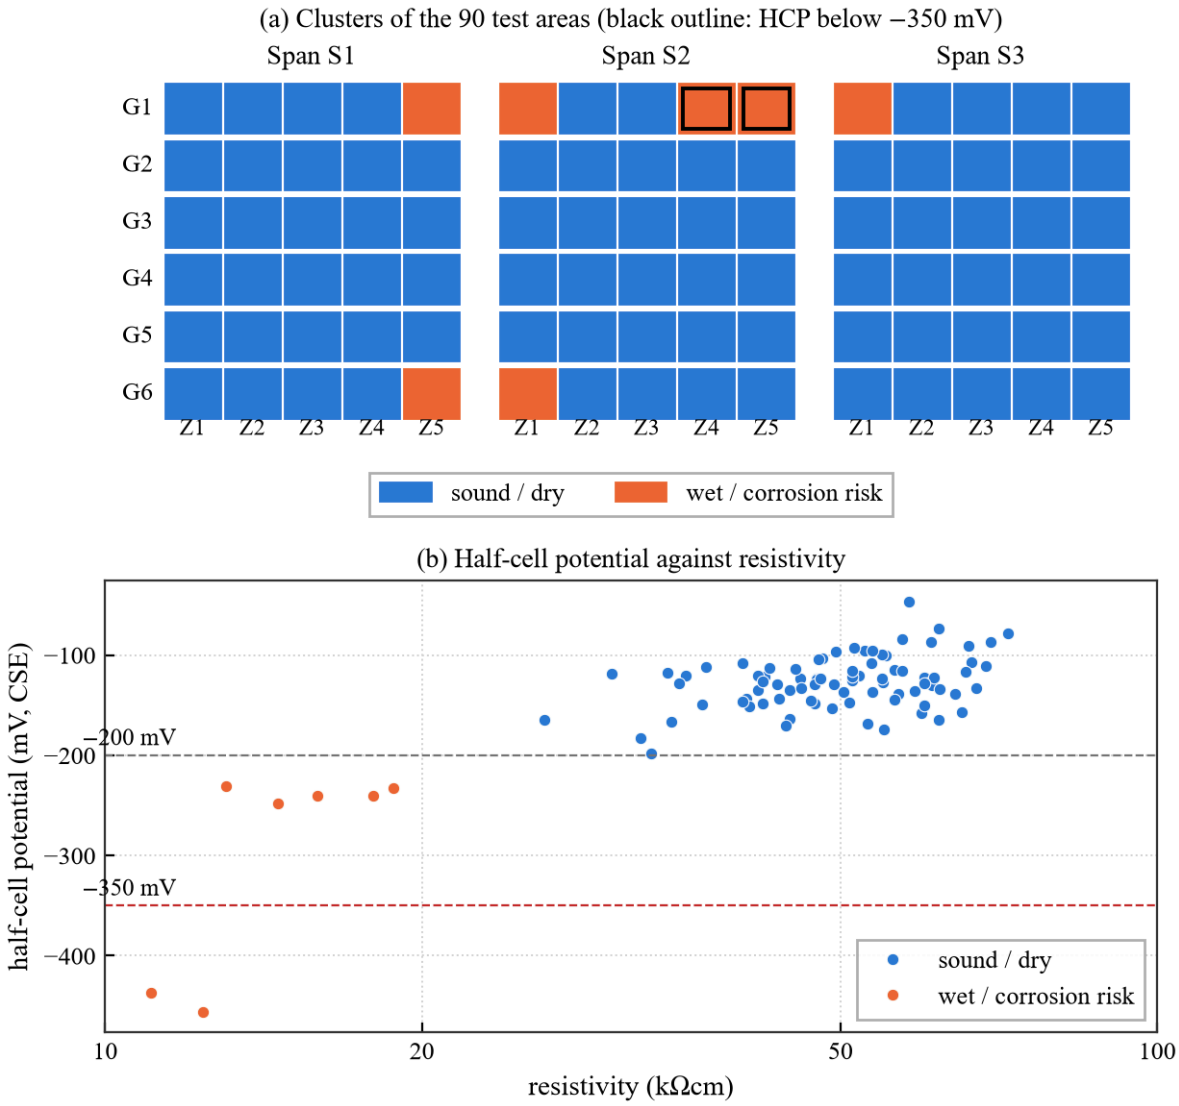


Figure 24: Year-18 NDT survey of all girders grouped by a Gaussian mixture model, and half-cell potential against resistivity with the limits of ASTM C876

The clustering is useful because it is unsupervised: it knows nothing about the joints, yet it separates the wet end zones next to both piers from the rest of the bridge, which tells the engineer that the joint over pier P1 also needs attention. The engineering limits then single out the G1 end zone of S2. The UPV and rebound values are normal almost everywhere, so the problem is one of water and steel, not of concrete quality.

14.3 AI/ML output and its interpretation

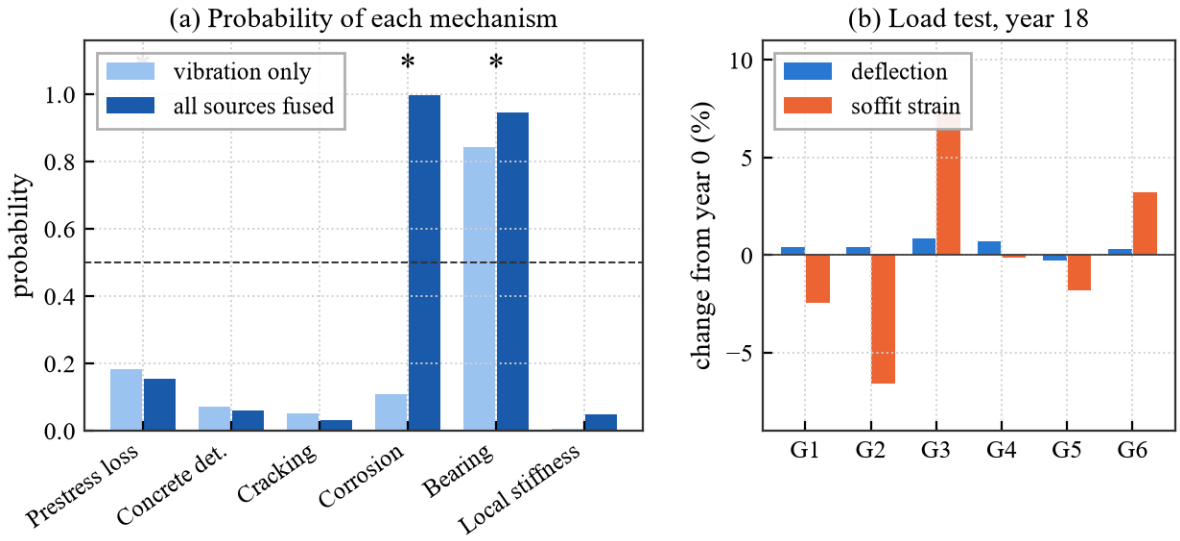


Figure 25: Year-18 campaign: probability of each mechanism from the models using vibration only and all sources (* marks the mechanisms actually present), and change of the load-test response of each girder since year 0

The Mahalanobis distance of the year-18 campaign is 186, against a threshold of 6.9, so the bridge is clearly no longer in its healthy state. Most of the distance comes from inspection features that are always zero on the healthy bridge, such as rust stains. The models using all sources give the highest probabilities to corrosion (1.00), bearing deterioration (0.95), loss of prestress (0.15). The models using vibration only give bearing deterioration 0.84, loss of prestress 0.18: they find the bearings, which stiffen the span, and nothing else. The localisation model gives G1 a probability of 0.55.

The estimate of the prestress loss needed more care. My first version of the Gaussian-process model, which used the largest crack width of any type as an input, gave **18 %** for this campaign. It had been misled by the 0.45 mm rust-stained splitting cracks at the joint end: in its training data a visible crack on a girder almost always meant a flexural crack, and flexural cracks appear only after a loss of about 25 %. The crack feature was then split into flexural cracks and cracks along bars or ducts, and the model was retrained. It now gives 9.5 ± 6.3 % (95 % band), and its error on the test set also became smaller. Because the levels and the VW strain changed mainly in G1, the G1 measurements were also inverted directly with the sensitivities of Eq. (15), which gives 4.4 ± 3.2 % for G1 (levelling 2.3 %, VW strain 5.8 %). The two estimates overlap. The

direct estimate for G1 was used in the structural check, because it rests on two measurements whose physics is clear, and the Gaussian-process value was kept as an upper indication.

The result also makes physical sense. A leaking joint explains the bearing distress in both spans next to it, the wet concrete and low resistivity at the girder ends, and, through the anchorages at that end, a possible loss of prestress in G1. The slight rise of f_1 fits restrained bearings. The absence of any change in UPV and rebound rules out a problem with the concrete. The load test changed little, which is consistent with a girder that has lost some precompression but has not cracked. The output of the models is therefore consistent with one cause, the joint, and three consequences. What it cannot show is whether the strands inside the ducts near the G1 anchorage are corroding; only an investigation of the tendons can show that, so one has to be included in the maintenance scheme.

14.4 Structural check with the estimated loss

With the estimated loss in G1 (4.4 %), the margin of the soffit stress against cracking under the rare combination becomes +0.09 MPa on the design basis ($0.9P_m$) and +2.33 MPa with the mean prestress, and the soffit stress under the quasi-permanent combination is still +4.6 MPa compression. The flexural capacity at mid-span is not affected by a loss of force, since the strands yield at failure anyway, and M_{Ed}/M_{Rd} remains 0.76. At the corroded end B the vertical component of the prestress decreases, and the net design shear 2.75 m from the bearing rises from 690 to 757 kN, still below $V_{Rd,max}$ = 1333 kN and covered by the links provided. The girder is therefore safe at present, but it is close to losing its design margin against cracking, and its condition will become worse if water continues to reach the anchorage.

14.5 Comparison with the hidden history

The history used to generate the data was: failure of the joint seal over pier P2 in year 9; restraint of the bearings at end B (shear stiffness ×100) with slight hardening at end A, from year 10; corrosion of G1 at end B between 28.5 and 33.0 m with a strand area loss of 8.4 %, from year 11; an extra loss of prestress of 6.3 % in G1. The assessment found all three mechanisms and their common cause, located them correctly, and estimated the loss of prestress in G1 within its stated uncertainty. It could not measure the corrosion of the strands inside the ducts, but it showed where this has to be investigated.

15 Maintenance Scheme

The maintenance decision combines all the available information: visual inspection, NDT, structural response measurement, vibration monitoring and the AI/ML assessment. In this scheme the AI/ML output is one line of evidence among several. An action is triggered by the evidence itself (a crack, a potential map, a bearing that does not move), and the AI/ML result mainly sets the priority and indicates what should be checked next. For example, a probability

of 0.8 for 'loss of prestress' leads to a measurement of the remaining force, and not directly to strengthening of the girder.

15.1 Decision framework

The decision follows the sequence condition assessment → routine monitoring or detailed investigation → maintenance or repair → reinspection and monitoring. If no monitoring alarm is raised and no defect is worse than CS2, the bridge stays under routine monitoring. Otherwise a detailed investigation follows (special inspection, targeted NDT, structural assessment), then maintenance or repair, in which the cause is removed before the damage is repaired, and finally reinspection and a new baseline. The evidence patterns used to choose the actions are summarised in Table 26.

Table 26: Decision matrix used for B33

Evidence	Interpretation	Action
All sources within baseline, CS <= 2	healthy, normal ageing	routine inspection and monitoring
Frequency residual alarm only, nothing else	environment / mass / traffic effect or early stiffness loss	check temperature model and records, repeat in 1 month; do not act on frequency alone
Frequency rise + bearing movement drop	bearing restraint (seizure / debris)	inspect bearings and joint, clean, replace
Level sag + VW tension, no cracks	prestress loss beyond the creep prediction	lift-off / stress release test, assessment
Level sag + load-test softening + flexural cracks	decompression lost, girder cracked	assessment, load management, external PT
HCP < -350 mV + low resistivity + carbonation at cover	active corrosion of links / bars	patch repair, coating, inhibitor
Corrosion signs near anchorages / joint ends	possible strand corrosion in ducts	GPR + impact-echo + borescope, assessment
Low UPV + low rebound over a zone	concrete deterioration / honeycombing	cores, petrography, repair or encasement
Local deflection / strain jump at one girder + spalling	local stiffness loss (impact, delamination)	special inspection, repair

15.2 Maintenance plan for B33 after the year-18 assessment

The assessment places the bridge in the category **serious** (detailed investigation). The plan in Table 27 first removes the cause, i.e. the water at the joint over pier P2, then repairs the damage the water has done, then measures what the monitoring can only infer, and finally establishes a new baseline so that the repaired bridge is again compared with itself.

Table 27: Maintenance actions, time frames and the evidence behind each

Action	When	Reason
Clean and extend drainage spouts	within 1 month	blocked or short drain spouts wetting the outer girder (inspection)
Replace strip-seal expansion joint	within 3 months	expansion joint seal leaking (inspection)
Jack deck and replace / reset bearings	within 6 months	practically no bearing movement at one end; bearing distress seen at inspection
Concrete repair: remove carbonated / delaminated cover, treat bars, polymer-modified mortar	within 6 months	HCP -456 mV with resistivity 11 kΩcm; spalling and rust (NDT, inspection)
Anti-carbonation coating on repaired and low-cover zones	after repair	zones with low cover
Migrating corrosion inhibitor on wet, low-resistivity zones	with repair	wet zones with potentials in the uncertain band
Tendon investigation: GPR to locate ducts, impact-echo for voids, borescope through drilled ports at anchorages	within 3 months	corrosion near the tendon anchorages; probability of corrosion from the models 1.00
Prestress check: lift-off or saw-cut (stress-release) test on the suspect girder	within 6 months	estimated extra loss of prestress in G1 4.4 ± 3.2 %; trend alarms on VW strain G1, level G1
Detailed structural assessment with measured losses (SLS decompression, ULS, shear at the end zone)	within 3 months	soffit margin against cracking only +0.09 MPa (rare combination) with the estimated loss
Epoxy injection of cracks wider than 0.2 mm, sealing of finer cracks	within 6 months	crack width 0.45 mm
Additional instrumentation: crack gauges, extra VW gauges at the end zone, bearing LVDTs on all girders	within 1 month	monitoring alarms on f1 residual, f2 residual, bearing B movement, bearing A movement, VW strain G1, level G1
Special inspection by a bridge engineer (under-bridge unit, close visual of all girders)	within 2 weeks	serious defect or monitoring alarm
Re-inspection and repeat monitoring campaign after the works	6 months after works	to confirm the effect of the works and set a new baseline

15.3 Sequence and justification

The drains and the joint come first, because every other defect found is a consequence of water; repairing the concrete or the bearings while the joint still leaks would waste the repair. The bearings of S2 at end B, and of S3 at end A under the same joint, are replaced by lifting each span on jacks placed under the end diaphragm, which was designed as a jacking beam; the lift is limited to 10 mm and the joint is closed to traffic for one night per span. Concrete repair at the G1 end zone and on the pier cap follows the half-cell map, with an anti-carbonation coating on the repaired and low-cover areas and a migrating corrosion inhibitor where the potentials are in the uncertain range.

The investigation of the tendons (GPR to locate the ducts, impact-echo along them, and a borescope through a small hole drilled at the anchorage and at the high points of the ducts) and a lift-off or stress-release test on G1 decide the last step. If the measured force confirms a loss that removes the margin against cracking, external post-tensioning restores it, with two straight 12T15 tendons per girder, deviators at the mid-span cross girder and anchorages on the end diaphragms (IRC:SP:40). If not, the girder is kept under closer monitoring.

15.4 Inspection and monitoring after the works

Until the works are complete, routine inspection is carried out monthly until works, the monitoring data are reviewed weekly, and a principal inspection follows the works and is repeated after one year. Crack gauges, two additional VW gauges at the end zone of G1 and bearing transducers on all girders of S2 are installed at once and kept for at least two years after the repair. After the works the commissioning tests of Chapter 5 are repeated (ambient vibration test, load test, NDT of the repaired zones) and become the new baseline. The bridge returns to the routine regime (routine inspection before and after the monsoon, principal inspection every three years and quarterly review of the monitoring data) when two years of data after the repair remain within the new limits.

15.5 Longer-term improvements

Each of the four expansion joints is a possible source of water. When the joint between S2 and S3 is replaced, a continuity (link) slab over the piers should be considered, which would leave only the two joints at the abutments. The drain spouts of all spans should be extended at least 100 mm below the soffit of the girders and given a drip groove; this costs little and removes the second source of wetting found in this assessment.

16 Use of AI Tools and Verification of Results

I used three AI tools during this work (Table 28): Claude for the Python scripts and for cross-checking the results, ChatGPT for ideas on writing the report, and Gemini for parts of the HTML. The assumptions, models, equations, units, results, interpretation and decisions in this report are my own responsibility.

Table 28: AI tools used in this work

AI tool	Used for
Claude (Anthropic)	help in writing and debugging the Python scripts, and then in cross-checking the results against hand calculations and the codes
ChatGPT (OpenAI)	taking ideas for writing the report: the order of the chapters, what each should cover and the wording of some explanations
Gemini (Google)	writing parts of the HTML and CSS used to lay out the report (tables, equations, captions) before printing it to PDF

I used these tools only as assistants. I ran and checked everything they suggested or helped me to write, and changed it where it was wrong. The problems I found and corrected in this way were:

- My first cable layout moved two cables sideways inside the 300 mm web, which is impossible. I redrew the profiles so that the lateral movement takes place inside the bottom bulb, and added a check of the duct positions along the whole girder.
- Stressing all four cables at 10 days gave 18.6 MPa at the soffit against an allowable 17.3 MPa, so I changed to two-stage stressing.
- The first vibration model gave peak accelerations of 170 mg, because the bounce frequencies of the lorries coincided with the first mode and the ambient forcing was too strong. I recalibrated both until the night-time RMS (0.6 to 0.8 mg) and the traffic peaks (10 to 25 mg) were of the order reported for bridges of this size.
- With 10-minute records and simple peak picking the scatter of f_1 was ±0.5 %; 30-minute records with a fitted spectrum reduced it to about 0.1 %.
- The AutoMAC check showed that my first sensor layout could not separate two pairs of modes, so I added two accelerometers.
- Identifying the commissioning test with the mode shapes of the design model biased f_2 by 3.6 %; I now identify the commissioning test without model shapes (FDD).
- The first synthetic inspection detected every hardened bearing and every case of 2 % corrosion, which made inspection look perfect. I made detection depend on severity, and also allowed leaking joints on sound bridges.
- The novelty detector failed at first on the inspection features, because their covariance matrix was singular; I added a small value to its diagonal and checked the effect on the false-alarm rate.
- My first prestress-loss model mistook corrosion cracks for flexural cracks and estimated an 18 % loss for the year-18 campaign. I split the crack feature by type and checked the estimate against a direct physical inversion (Section 14.3).
- I checked the impact factor for the 70R wheeled vehicle on a 33 m span, the IRC:6 footway load for spans over 30 m and the reduction for three lanes against the code.

In addition, I made 20 independent checks of the computed results with simpler methods: hand formulas, a separate influence-line calculation, Courbon's method, the frequency formula for a simply supported beam, and recovery of the known parameters from synthetic measurements. 20 of the 20 checks are within their tolerances (Appendix B).

17 Conclusions

Table 29: Main results

Item	Result
Configuration	33 m span; six 1.80 m deep M45 girders at 2.70 m; 225 mm deck slab; end diaphragms and one cross girder at mid-span
Live load on outer girder	2426 kN m (grillage), 2457 kN m (Courbon)
Prestress	four 12T15 cables per girder, two-stage stressing; P_e = 7.17 MN, total loss 23.5 %
Serviceability and strength	rare-combination soffit stress -2.27 MPa (uncracked); M_{Ed}/M_{Rd} = 0.76; live-load deflection 11.8 mm
Healthy baseline	f_1 = 3.74 Hz, f_2 = 3.93 Hz at 25 °C; -0.15 %/°C; load-test deflection 6.31 mm
AI/ML (test set)	macro-F1 0.32 with vibration only, 0.90 with all sources; prestress loss estimated with MAE 2.6 %
Year-18 assessment	BCI 38; category serious (detailed investigation); leaking joint over pier P2 causing restrained bearings, corrosion near the G1 anchorage and a loss of prestress of about 4 % in G1

The main conclusions of the study are:

- A 33 m span with six 1.80 m deep post-tensioned M45 girders at 2.70 m, four 12T15 cables per girder and two-stage stressing satisfies IRC:6 and IRC:112, with the soffit uncracked under the rare combination (margin about 1 MPa) and a moment utilisation of 0.76. The number of girders was governed by the limited construction depth rather than by the quantity of material.
- The healthy baseline has to come from measurements on the bridge; the design model alone is not good enough. It was 7 to 10 % off in frequency; after three parameters had been updated on the commissioning tests, the twin reproduced them within 0.2 %. One year of data provided the temperature and traffic normalisation without which the frequencies of this bridge are not usable, since they vary by about 4 % over a year.
- Vibration monitoring alone is poor at detecting the two mechanisms that usually decide the life of a post-tensioned bridge, loss of prestress and corrosion. Levelling, embedded VW gauges and bearing displacement transducers are inexpensive and detect them much better, and NDT and visual inspection remain essential for corrosion.
- The AI/ML assessment became useful mainly through combining the data sources, much more than through the choice of algorithm: the macro-F1 rose from 0.32 with vibration to 0.90 with all sources. The importance of the features agrees with the physics, and the Gaussian process gives the loss of prestress with a realistic uncertainty.
- Applied to the bridge at 18 years, the assessment traced the defects to one cause, a leaking joint, located them, estimated the loss of prestress in the affected girder, and led to a maintenance plan that removes the cause, repairs the damage, measures what the monitoring can only infer, and re-establishes the baseline. My first version of the prestress

model was misled by corrosion cracks, which showed me that every ML output has to be checked against the physics before it is used for a decision.

The work could be extended by calibrating the noise models and the detection thresholds with data from an instrumented bridge, by replacing the grillage with a finite-element model that represents bond and crack behaviour, and by adding the cost of the actions so that the timing of maintenance can be optimised over the life of the bridge.

References

1. Breiman, L. (2001). Random forests. *Machine Learning*, 45, 5–32.
2. Brincker, R., Zhang, L. and Andersen, P. (2001). Modal identification of output-only systems using frequency domain decomposition. *Smart Materials and Structures*, 10(3), 441–445.
3. Concrete Society (2010). *Durable Post-Tensioned Concrete Structures*, Technical Report 72. Camberley.
4. Farrar, C.R. and Worden, K. (2013). *Structural Health Monitoring: A Machine Learning Perspective*. Wiley.
5. Hambly, E.C. (1991). *Bridge Deck Behaviour*, 2nd ed. E & FN Spon, London.
6. Hamed, E. and Frostig, Y. (2006). Natural frequencies of bonded and unbonded prestressed beams – prestress force effects. *Journal of Sound and Vibration*, 295, 28–39.
7. IRC:5-2015. *Standard Specifications and Code of Practice for Road Bridges, Section I: General Features of Design*. Indian Roads Congress, New Delhi.
8. IRC:6-2017. *Standard Specifications and Code of Practice for Road Bridges, Section II: Loads and Load Combinations*. Indian Roads Congress, New Delhi.
9. IRC:83 (Part II)-2018. *Standard Specifications and Code of Practice for Road Bridges, Section IX: Bearings, Part II: Elastomeric Bearings*. Indian Roads Congress, New Delhi.
10. IRC:112-2020. *Code of Practice for Concrete Road Bridges*. Indian Roads Congress, New Delhi.
11. IRC:SP:35-1990. *Guidelines for Inspection and Maintenance of Bridges*. Indian Roads Congress, New Delhi.
12. IRC:SP:40-2019. *Guidelines on Techniques for Strengthening and Rehabilitation of Bridges*. Indian Roads Congress, New Delhi.
13. IRC:SP:51-2015. *Guidelines for Load Testing of Bridges*. Indian Roads Congress, New Delhi.
14. IRC:SP:52-1999. *Bridge Inspector's Reference Manual*. Indian Roads Congress, New Delhi.
15. IRC:SP:80-2008. *Guidelines for Corrosion Prevention, Monitoring and Remedial Measures for Concrete Bridge Structures*. Indian Roads Congress, New Delhi.
16. IS 516 (Part 5/Sec 1):2018 and IS 516 (Part 5/Sec 4):2020. *Hardened Concrete – Methods of Test, Non-Destructive Testing: Ultrasonic Pulse Velocity; Rebound Hammer*. Bureau of Indian Standards, New Delhi.
17. ASTM C876-15. *Standard Test Method for Corrosion Potentials of Uncoated Reinforcing Steel in Concrete*. ASTM International.
18. Peeters, B. and De Roeck, G. (2001). One-year monitoring of the Z24-Bridge: environmental effects versus damage events. *Earthquake Engineering and Structural Dynamics*, 30(2), 149–171.
19. Rasmussen, C.E. and Williams, C.K.I. (2006). *Gaussian Processes for Machine Learning*. MIT Press.
20. Sohn, H. (2007). Effects of environmental and operational variability on structural health monitoring. *Philosophical Transactions of the Royal Society A*, 365, 539–560.
21. Woodward, R.J. and Williams, F.W. (1988). Collapse of Ynys-y-Gwas bridge, West Glamorgan. *Proceedings of the Institution of Civil Engineers, Part 1*, 84, 635–669.
22. Worden, K., Manson, G. and Fieller, N.R.J. (2000). Damage detection using outlier analysis. *Journal of Sound and Vibration*, 229(3), 647–667.

Appendix A: Program Files

Table 30: Program and data files

File	Content
psc/inputs.py	all adopted dimensions, materials, loads and criteria
psc/section.py, grillage.py, vehicles.py	section properties; grillage model (static analysis, influence surfaces, modal analysis); IRC vehicles and the search for the worst position
psc/prestress.py, design.py	cable geometry, losses, stage stresses, ULS, shear, bearings, comparison of girder arrangements
psc/twin.py, dynamics.py	digital twin (deterioration state to responses); vibration simulation; FDD and modal-filter identification
psc/condition.py, scenarios.py, features.py	inspection and NDT models; deterioration scenarios; generation of campaigns; feature extraction
psc/mlkit.py, maintenance.py	machine-learning methods written with numpy and scipy; decision rules
run_01_design.py to run_05_case_study.py	the five steps of the study, run in this order
verify.py	independent checks (Appendix B)
make_figures.py, make_figures_ml.py, build_report.py	figures and this report
inspection_app/index.html	digital visual inspection application (single file, works offline)
out/data/*.csv	baseline year, scenario library, NDT surveys, visual inspection, 18-year monitoring record

The programs need Python 3 with numpy, scipy and matplotlib. The five `run_*.py` scripts are run in order, followed by `verify.py`, `make_figures.py` and `build_report.py`. The complete chain takes about half an hour on my laptop (16 threads), most of it for the 3600 vibration records of the scenario library.

Appendix B: Verification Checks

Table 31: Independent checks of the computed results

Check	Computed	Independent	Difference	Tolerance	Result
precast area (polygon vs pieces)	0.855 m2	0.855	0.0 %	0 %	pass
precast centroid height (trapezoid centroids approximated at mid-height)	0.912 m	0.9131	0.1 %	1 %	pass
sum of girder mid-span moments, 10 kN/m per girder	8149 kNm	8168	0.2 %	1 %	pass
mid-span deflection, inner girder	6.782 mm	6.792	0.1 %	3 %	pass

Check	Computed	Independent	Difference	Tolerance	Result
G1 LL moment: grillage vs Courbon (Courbon valid here: L/B = 2.06, stiff cross girders)	2457 kNm	2426	1.3 %	5 %	pass
Class A max mid-span moment (one train)	3172 kNm	3172	0.0 %	0 %	pass
C3 force after friction at mid-span	2220 kN	2220	0.0 %	0 %	pass
total elastic shortening loss at mid-span (hand: (n-1)/2n rule, mean age 20 d)	370.3 kN	355	4.3 %	25 %	pass
G1 soffit stress, quasi-permanent (0.9 Pm)	3.319 MPa	3.365	1.4 %	5 %	pass
G1 ULS moment capacity	1.647e+04 kNm	1.649e+04	0.1 %	1 %	pass
bearing movement per degC (healthy)	0.1924 mm/°C	0.198	2.8 %	5 %	pass
f1, twin vs simply supported beam formula (beam ignores end blocks, cross girders and bearing flexibility)	3.741 Hz	3.842	2.6 %	4 %	pass
level change for 10 % prestress loss (hand: 10 % of the elastic Pe camber x (1 + chi phi))	10.38 mm	10.25	1.3 %	15 %	pass
VW strain change for 10 % prestress loss	123.9 με	123.9	0.0 %	2 %	pass
identified f1 from a simulated 30 min record	3.752 Hz	3.741	0.3 %	0 %	pass
identified f3 from a simulated 30 min record	8.837 Hz	8.815	0.3 %	0 %	pass
updated E_scale vs value used to create the data	1.055 -	1.06	0.5 %	6 %	pass
updated barrier vs value used to create the data	0.3598 -	0.35	2.8 %	6 %	pass
updated E_dyn vs value used to create the data	1.245 -	1.24	0.4 %	6 %	pass
novelty false alarm rate on healthy test data (99 % threshold from training data; small test sample)	0.03309 -	0.01	2.3 %	3 %	pass